

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max



Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**M2543A-135X-XBA**

1 2 3 4 5 6

- 1: — Series No.
2: — Height
3: — A:Gold Flash
B:Gold 3u"
Q:Tin Plated
4: — B:Black
W:White
U:Blue
R:Red
Y:Yellow
5: — B:Brass
6: — A:In bag

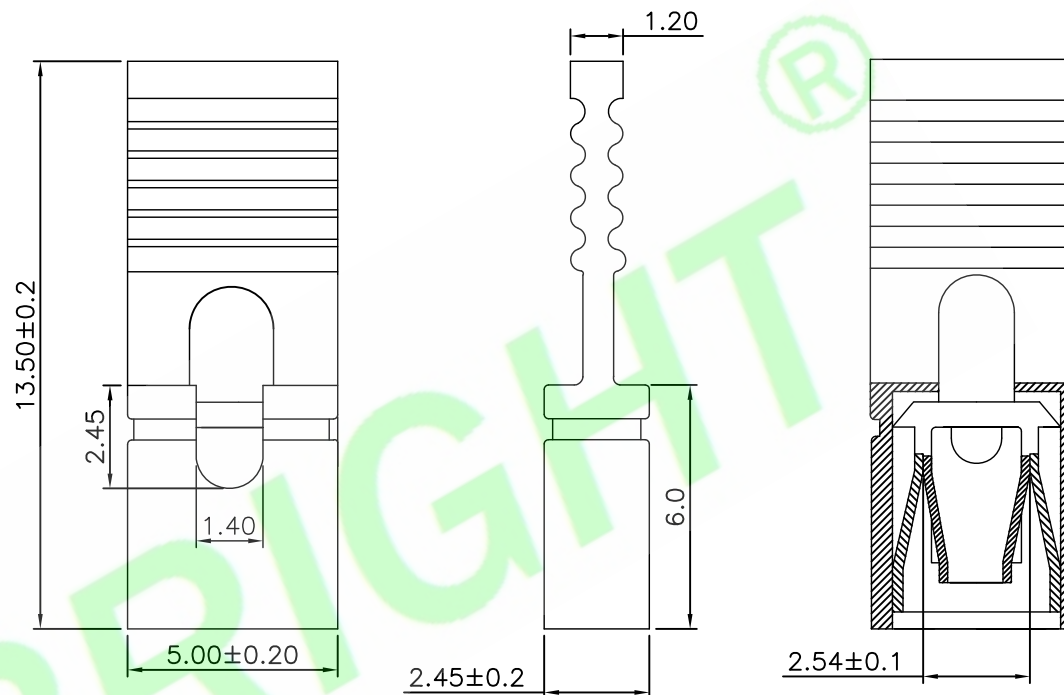

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : M2543A-135X-XBA		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0812-025					
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Mini Jumper Open Type H:13.5MM		SHEET: 1/1		A4	
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 31-DEC-2008		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						