

RoHS Compliant

Specifications:

Material And Finish:


Insulator:PBT UL94V-0
Contact:Phosphor Bronze
Plated:1.27 μ m Ni under plated

Rating:

Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-40 $^{\circ}$ ~+105 $^{\circ}$ C

Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

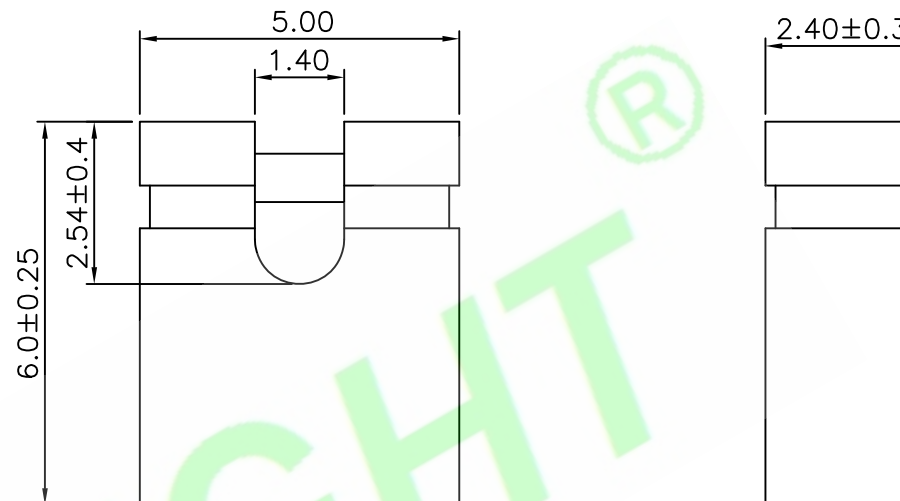

Ordering Information

M2542-60X-XA

1 2 3 4 5

1: — Series No.

2: — Height

3: — A:Gold Flash

D:Contact Area:Gold 10u";Solder tail:Gold Plated

F:Contact Area:Gold 20u";Solder tail:Gold Plated

Q:Tin Plated

4: — B:Black


W:White


U:Blue

R:Red

Y:Yellow

5: — A:In bag

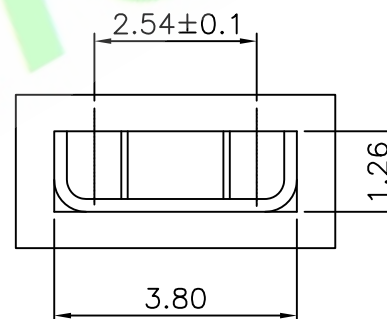

5X				DR.BY:	GENERAL TOLERANCE:		PART NO : M2542-60X-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				joy chen	LINEAR	ANGLES	DWG. NO.: RD0809-070			
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 2.54mm Pitch Mini Jumper Open Type H:6.0MM	SHEET: 1/1		A4
2X	Increase The Plating Code	Kenry	2015-6-19	Tony	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	joy chen		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 19-Sep-2008			