

RoHS Compliant



Specifications:

Material And Finish:

Insulator:PA6T(HTNFR52G30NH BK337) UL94V-0 Color:Black
 Contact:Copper alloy(C2600),
 Conductivity≥28%/ACS AT 20°C;

Rating:

Current Rating:3 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40°~+125°C

Electrical:


Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/DC

Ordering Information





25411M-03S152-NF

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — S:Matte Sn 2~4.5um over 0.75~2.5um Ni
- 5: — Package:
 F:In Tape&Reel

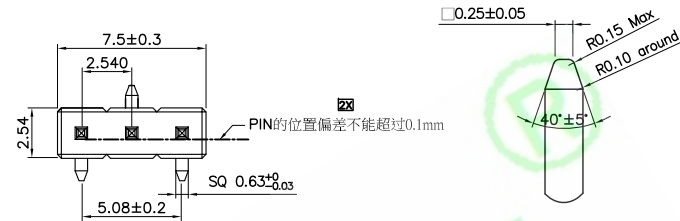

SCALE 3:1

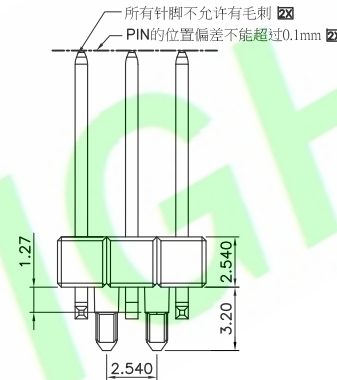

Recommended PCB Layout

Tolerance:±0.05

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 25411M-03S152-NF	
4X					LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :	
2X	增加尺寸管控	Aaron	20180104		X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header SMT Type	
1X	ORIGINAL	Aaron		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 28-Sep-2017	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4