

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S20222R-XXX50-NX**

1 2 3 4 5

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— A:Gold Flash
B:7u" Gold

D:10u" Gold

F:20u" Gold on Contact;Gold Flash on tail



H:Gold Flash on Contact;Matte Tin on tail

T:10u" Gold on Contact;Matte Tin on tail

Y:30u" Gold on Contact;Matte Tin on tail.

S:Matte Tin Plated.

- 5:— A:In bag
B:In Tube
C:In Tray

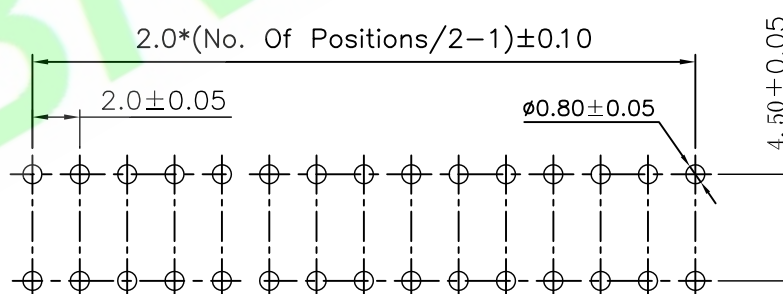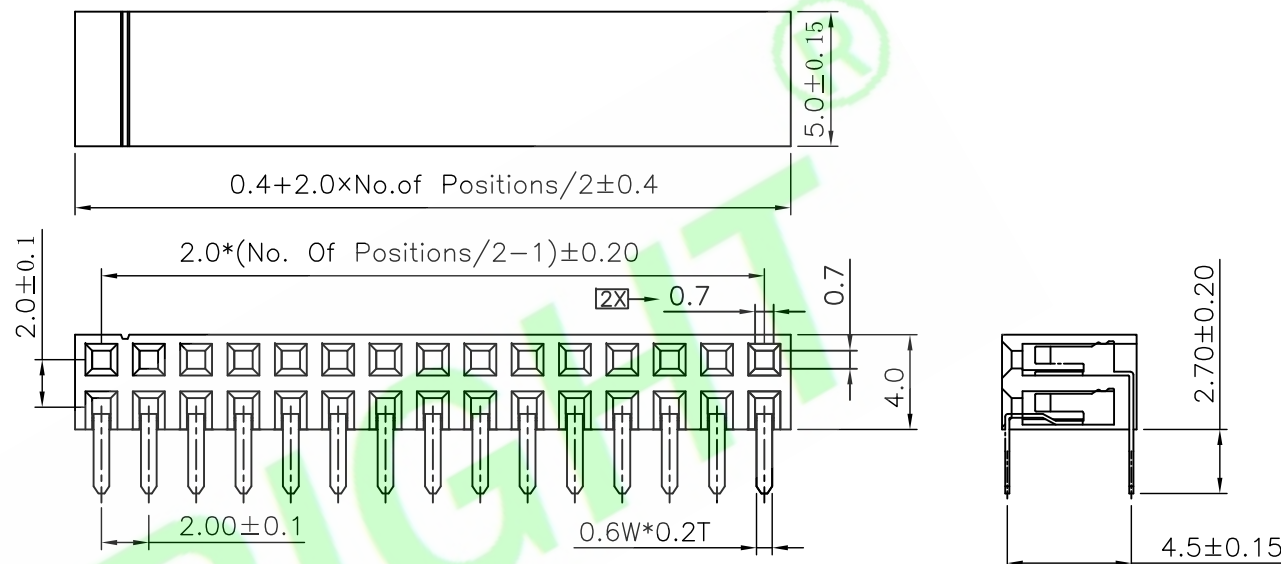

Recommended PCB Layout

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : S20222R-XXX50-NX		HJBRIGHT[®] 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.: RD0807-073				
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch PCB				
2X	0.7*0.9 Change 0.7*0.7mm	joy chen			x.x: ±0.20	x.x': ±3.0°	Socket Header R/A Type				
1X	ORIGINAL	joy chen		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 01-Jun-2010				
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°					