

**Specifications:**

**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

**Rating:**

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

**Electrical:**

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

**Ordering Information**

25411R-XXX142-NX

1 2 3 4 5





1: — Series No.

2: — R:R/A Type


3: — No. of Positions

4: — H:Gold Flash

5: — A:In bag

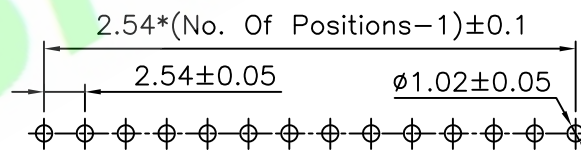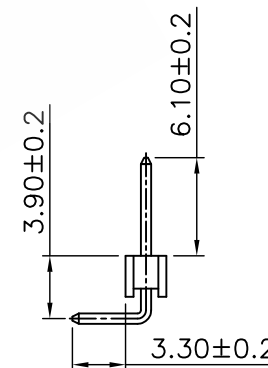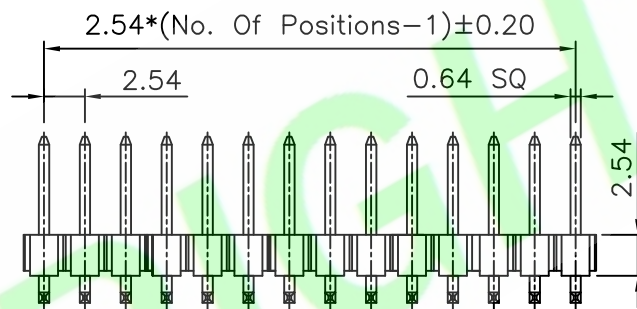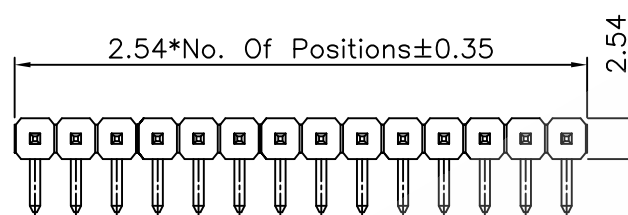

Recommended PCB Layout

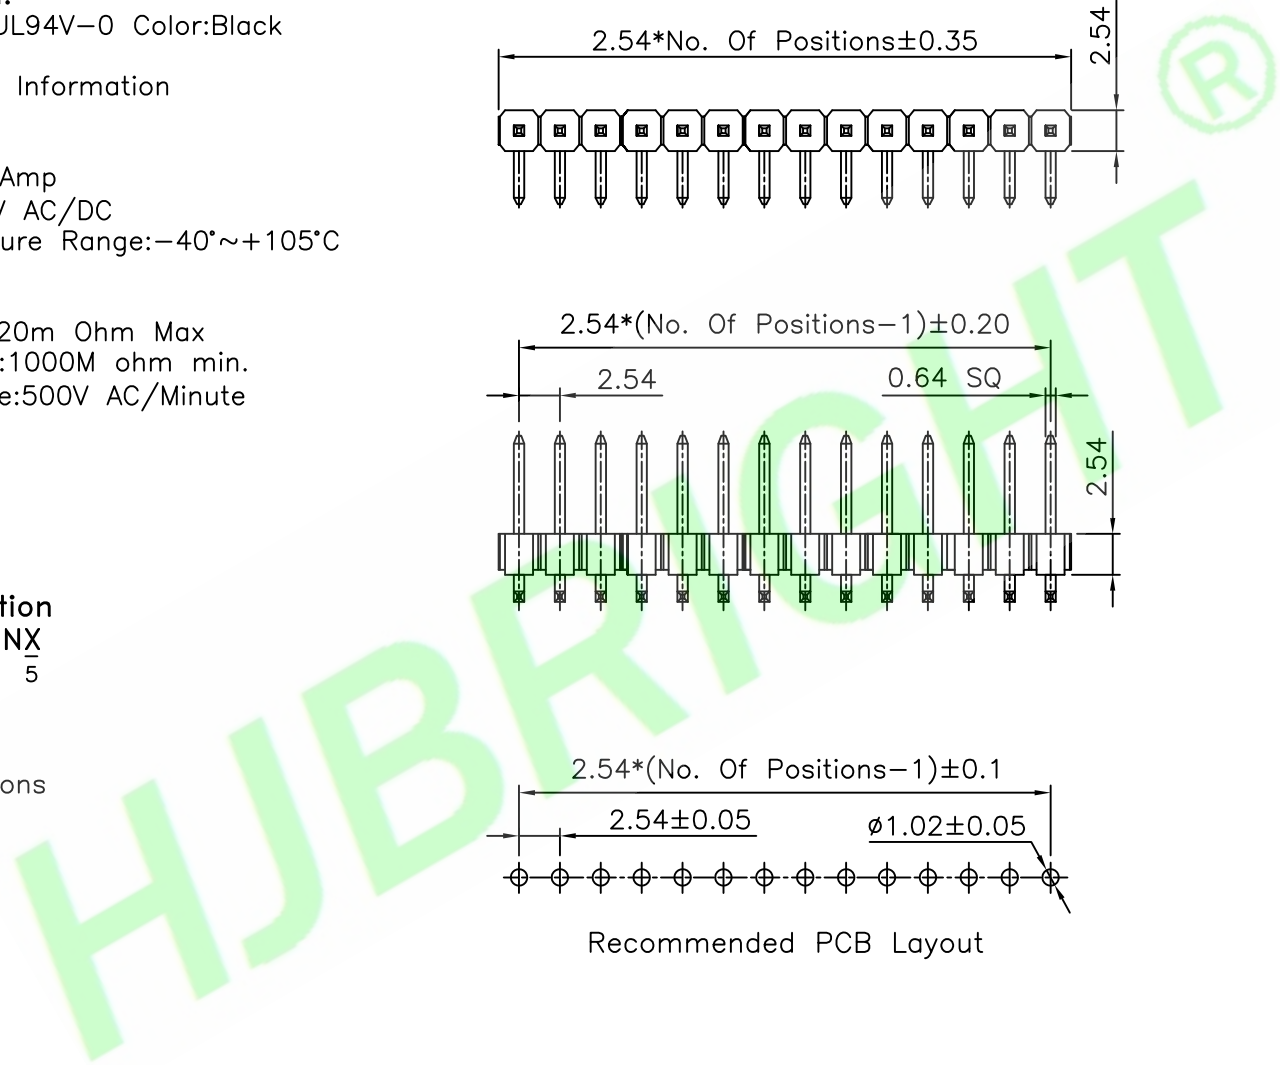

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : 25411R-XXX142-NX		<b>HJBRIGHT</b> ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:		
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE :		
2X	ORIGINAL	Kenry			X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header R/A Type		
1X					X.XX: ±0.15	X.XX': ±2.0°	DATE: 28-Nov-2014		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	SHEET: 1/1		 THIRD ANGLE PROJECTION
							SCALE: 1:1		
							UNIT: mm		