

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

S25411R-XXX85-02-X

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 D:Gold 15U" IN Contact Area
 H:Selective Gold Plated
 Q:Tin Plated
- 5: — A:In bag
 B:In Tube
 C:In Tray

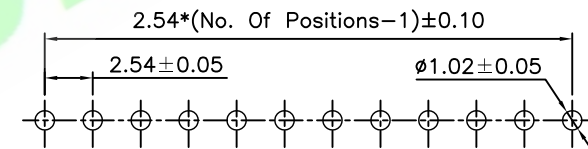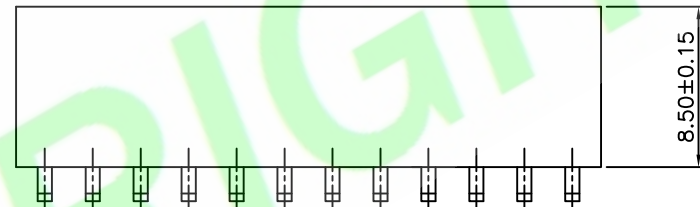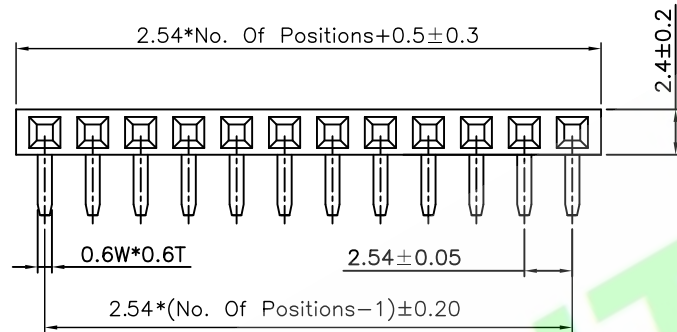

Recommended PCB Layout

| | | | | | | | | | |
|------|-------------|--------|----------|-------------------|--------------------|---------------|--|--|---|
| 5X | | | | DR.BY.: Samson | GENERAL TOLERANCE: | | PART NO : S25411R-XXX85-02-X | | HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED |
| 4X | | | | CHKD.: Tony | LINEAR | ANGLES | DWG. NO.: RD0807-101 | | |
| 3X | | | | APPD.: Billy | X.: ±0.30 | X': ±5.0° | TITLE : 2.54mm Pitch PCB Socket Header R/A Type | | SHEET: 1/1 |
| 2X | ORIGINAL | Samson | | | X.X: ±0.20 | X.X': ±3.0° | DATE: 11-JUL-2008 | | SCALE: 1:1 |
| 1X | DESCRIPTION | DR.BY | ECN. NO. | | X.XXX: ±0.10 | X.XXX': ±1.0° | | | UNIT: mm |
| REV. | | | | | | | | | THIRD ANGLE PROJECTION |

A4