

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C





Electrical:

Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

25411R-XXX131-NX
 1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 D:Gold 10U"
 H>Selective Gold Plated
 T:10u"Gold on contact; Matte Tin on tail
 Q:Tin Plated
- 5: — A:In bag
 B:In Tube

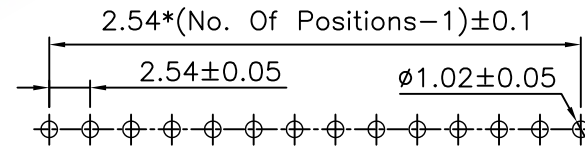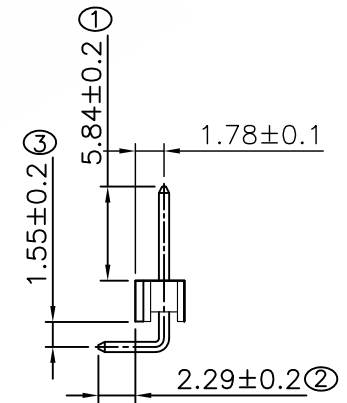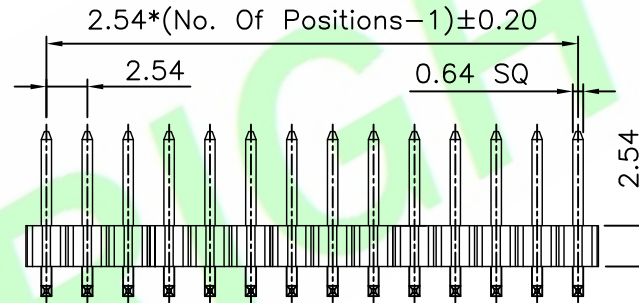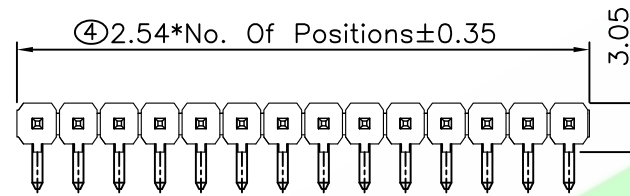


Recommended PCB Layout

5X				DR.BY.: 曾冬明	GENERAL TOLERANCE:		PART NO : 25411R-XXX131-NX	
4X				CHKD.: 朱波	LINEAR	ANGLES	DWG. NO.: RD0902-025	
3X				APPD.: 尹友江	X.: ±0.30	X': ±5.0°	TITLE :	
2X	新增电镀代码	Aaron	20180903		X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header R/A Type	
1X	ORIGINAL	joy chen			X.XX: ±0.15	X.XX': ±2.0°	DATE: 11-Aug-2012	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	SHEET: 1/1	

HJBRIGHT 东莞市华晶电子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



A4