

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

25412R-XXX148-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
- 5: — A:In bag
 B:In Tube
 C:In Tray

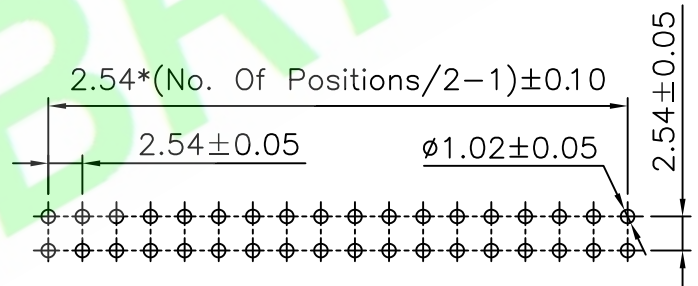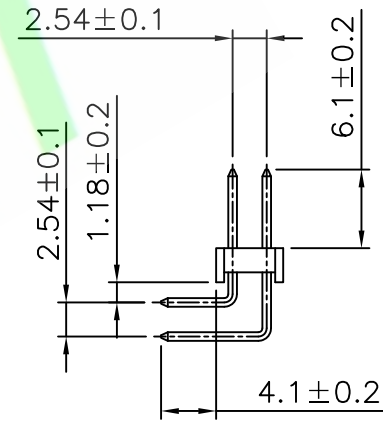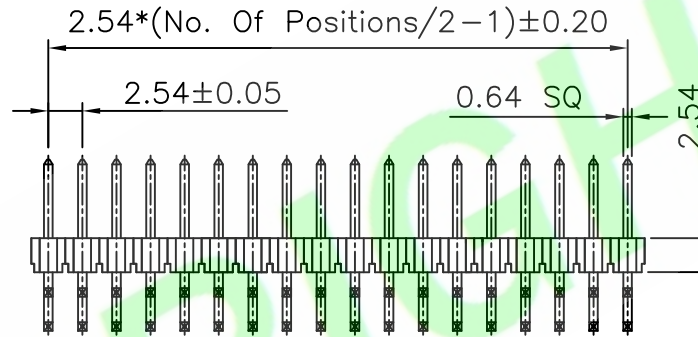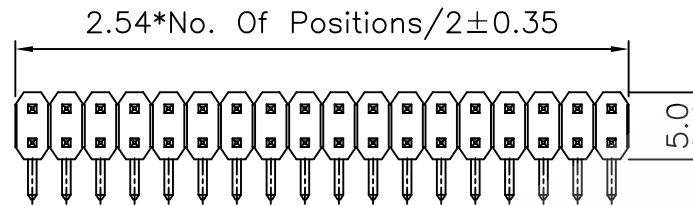

Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 25412R-XXX148-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X					LINEAR	ANGLES	DWG. NO.: RD0809-001		
3X				CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :		SHEET: 1/1
2X					X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header R/A Type		SCALE: 1:1
1X	ORIGINAL	Samson		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 15-Aug-2009		UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			THIRD ANGLE PROJECTION

A4