

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

25411R-XXX148-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 D:Gold 10u"
 H>Selective Gold Plated
 S:Matte Tin Plated
- 5: — A:In bag
 B:In Tube
 C:In Tray

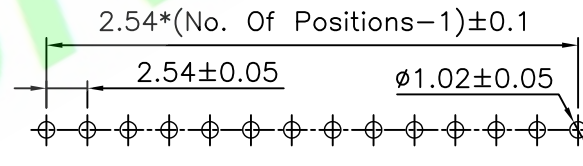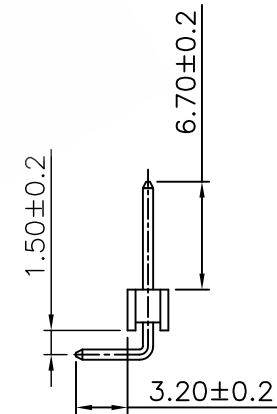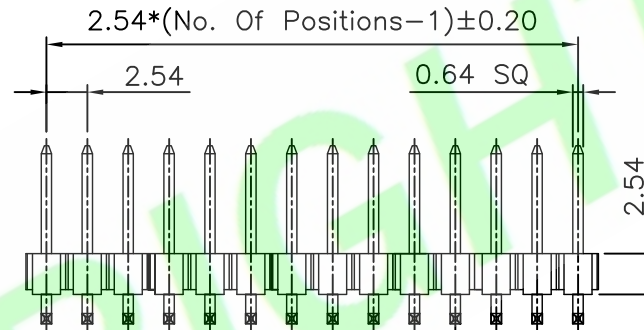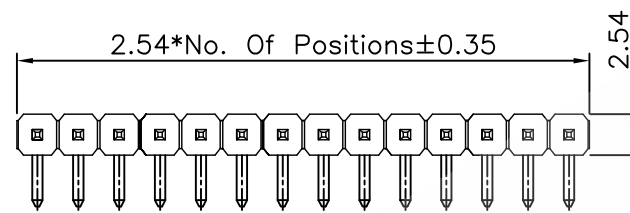

Recommended PCB Layout

| | | | | | | | | |
|------|-------------|-------|----------|---------|--------------------|---------------|----------------------------------|--|
| 5X | | | | DR.BY.: | GENERAL TOLERANCE: | | PART NO : 25411R-XXX148-NX | |
| 4X | | | | Apra | LINEAR | ANGLES | DWG. NO.: | |
| 3X | | | | CHKD.: | X.: ±0.30 | X': ±5.0° | TITLE : | |
| 2X | | | | Aaron | X.X: ±0.20 | X.X': ±3.0° | 2.54mm Pitch Pin Header R/A Type | |
| 1X | ORIGINAL | Apra | | APPD.: | X.XX: ±0.15 | X.XX': ±2.0° | DATE: 20-Nov-2017 | |
| REV. | DESCRIPTION | DR.BY | ECN. NO. | Billy | X.XXX: ±0.10 | X.XXX': ±1.0° | UNIT: mm | |

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4