

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information


25411R-XXX158-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R/R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
 H:Selective Gold Plated
 Q:Tin Plated
- 5: — A:In bag
 B:In Tube
 C:In Tray

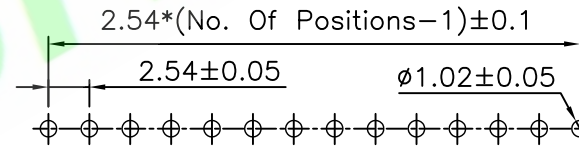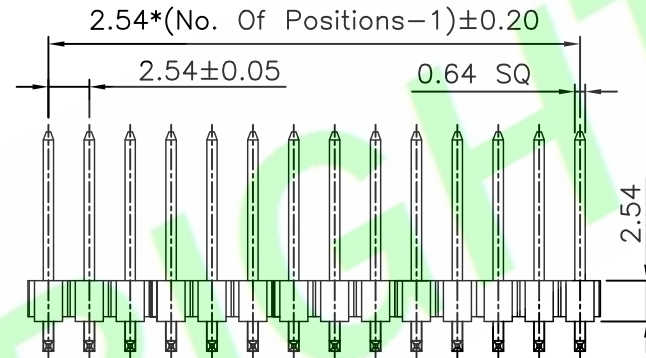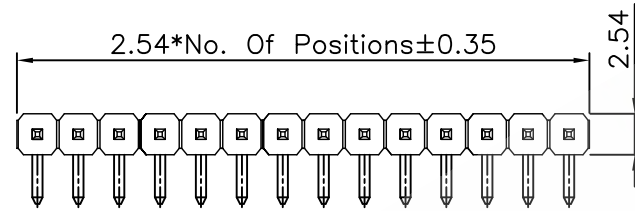

Recommended PCB Layout

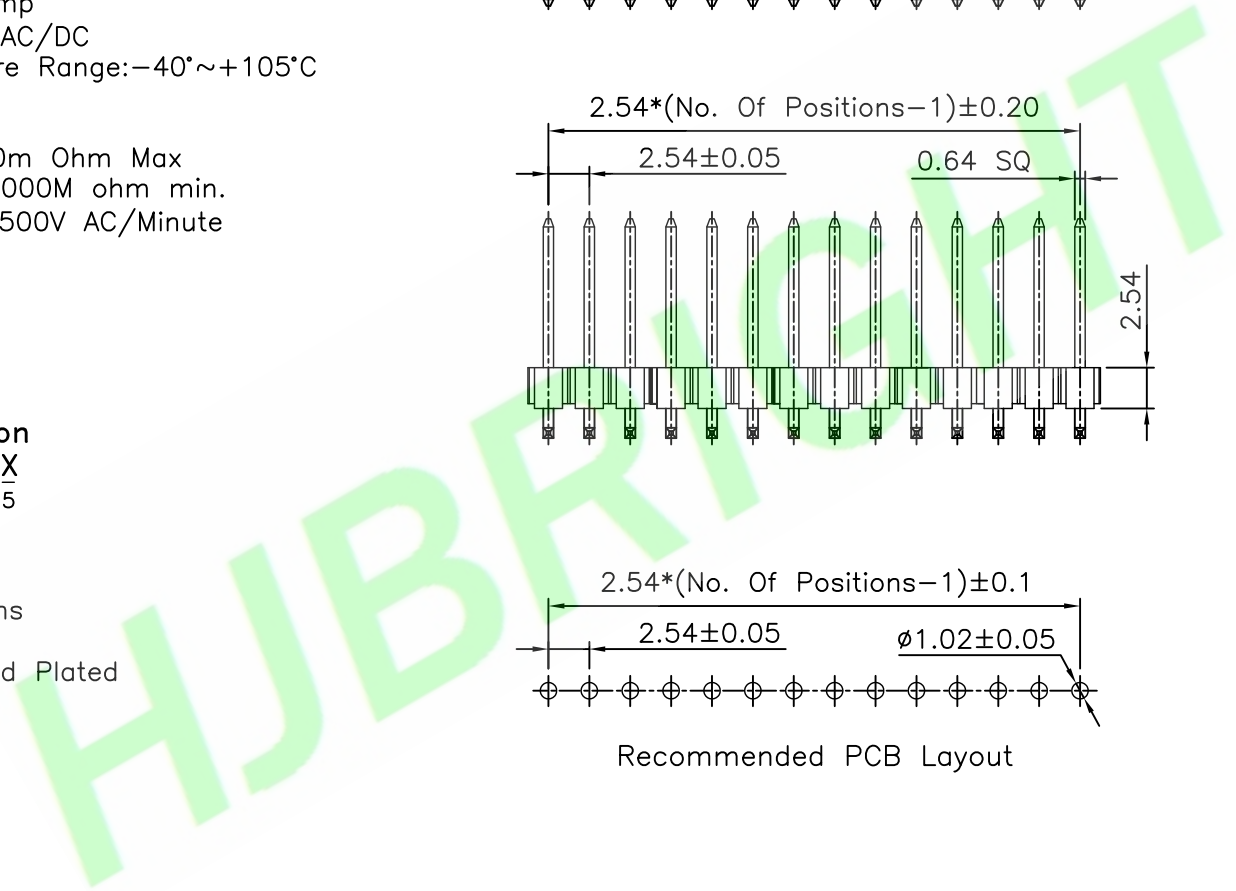

5X			DR.BY.:	GENERAL TOLERANCE:		PART NO : 25411R-XXX158-NX	
4X			Samson	LINEAR	ANGLES	DWG. NO.: RD0811-025	
3X			CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	
2X			Tony	X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header R/A Type	
1X	ORIGINAL	Samson	APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 21-Nov-2008	
REV.	DESCRIPTION	DR.BY	Billy	X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4