

Material And Finish:

Insulator:Glass-Filled Polyester, Color:Nature
Contact:Phosphor Bronze
Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Rated Voltage: 500V r.m.s contact to contact

Operating Temperature Range: $-55^{\circ} \sim +125^{\circ} \text{C}$

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Voltage proof: 750V r.m.s contact to contact


Ordering Information

P2007S-127T-01-X


- 1:—Series No.
2:—S:Staright type
3:—No. of Positions
4:—T:10u" Gold on contact;Matte Tin on tail
5:—B:In Tube
C:In Tray

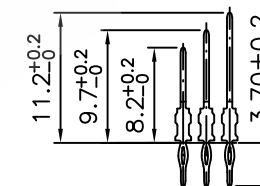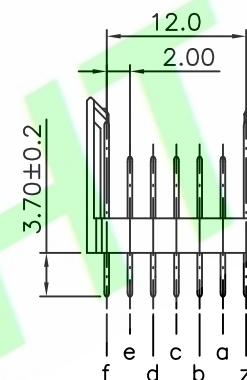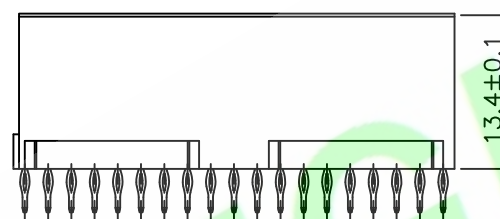

Pin Type

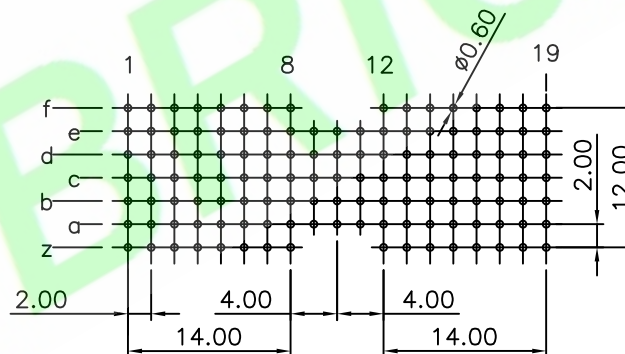

Recommended PCB Layout

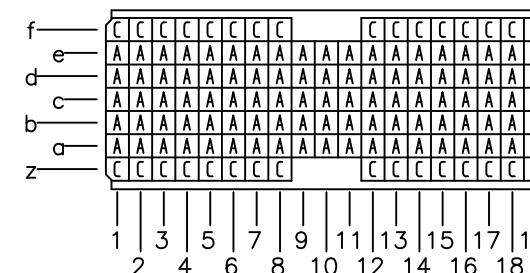

Contact Layout