

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute






Ordering Information

25481R-XXX136-NX
 1 2 3 4 5

- 1: Series No.
- 2: R/R/A Type
- 3: No. of Positions
- 4: A:Gold Flash

D:Contact Area:Gold 10u";Solder tail:Gold Plated
 F:Contact Area:Gold 20u";Solder tail:Gold Plated
 H:Contact Area:Gold Plated;Solder tail:Tin Plated.
 T:Contact Area:Gold 10u";Solder tail:Matte Tin Plated.
 Y:Contact Area:Gold 30u";Solder tail:Matte Tin Plated.
 Q:Tin Plated

- 5: A:In bag
- B:In Tube

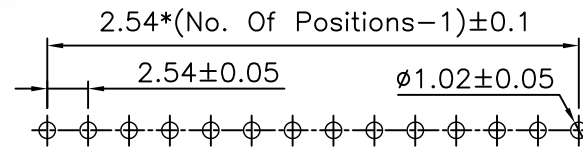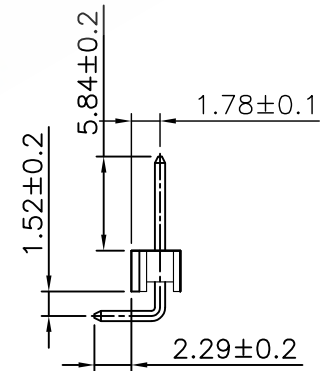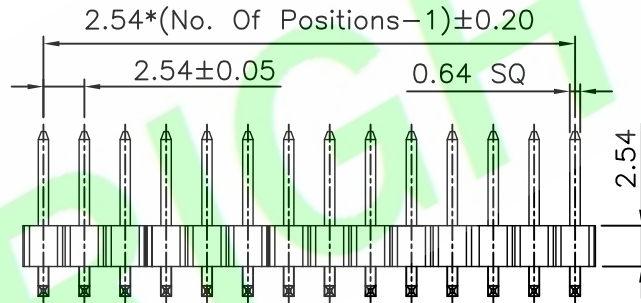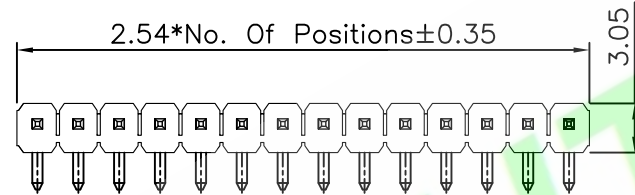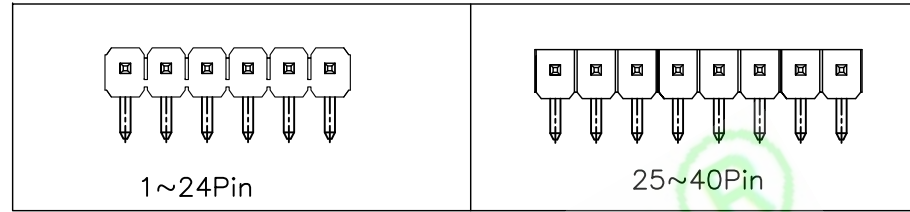

Recommended PCB Layout

RoHS Compliant

5X			DR.BY: joy chen	GENERAL TOLERANCE:		PART NO : 25481R-XXXA136-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X			CHKD.: jerry Liu	LINEAR	ANGLES	DWG. NO.: RD1112-003			
3X			APPD.: Peter Li	X.: ±0.30	X': ±5.0°	TITLE :		SHEET: 1/1	THIRD ANGLE PROJECTION
2X	joy chen			X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header R/A Type		SCALE: 1:1	
1X	ORIGINAL	joy chen		X.XX: ±0.15	X.XX': ±2.0°	DATE: 14-Dec-2011		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX': ±1.0°				A4