

Specifications:

Terminal: Phosphor Bronze, T=0.20mm

Wire Range: AWG#20~#24

Rating:

Current Rating: 5A AC,DC

Voltage Rating: 250V AC/DC

Electrical:

Contact resistance: 10m Ohm Max


Withstanding Voltage: 1500V AC/Minute

Ordering Information

H3005TM-PQ

1 23 45

- 1: — Series No.
- 2: — T: Terminal
- 3: — Terminal Type:
M: Male Terminal
- 4: — P: Phosphor Bronze
- 5: — Q: Tin Plated

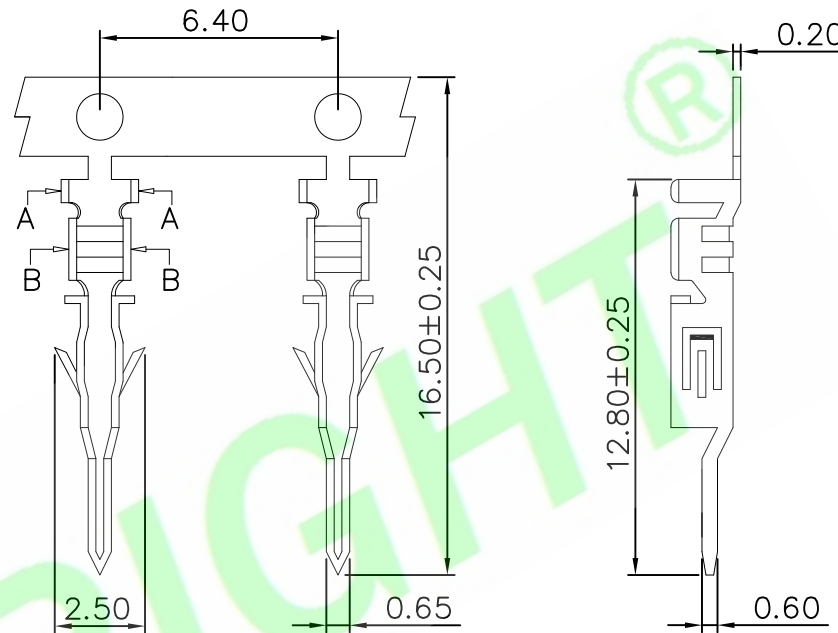

SECTION: A-A

SECTION: B-B

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : H3005TM-PQ		HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	X.:	X': ±1.0'	TITLE :		SHEET: 1/1	THIRD ANGLE PROJECTION
2X					X.X: ±0.20	X.X': ±	3.0mm Pitch male Terminal		SCALE: 1:1	
1X	ORIGINAL	Bruce		APPD.: Billy	X.XX: ±0.10	X.XX': ±	DATE: 22-Oct-2017		UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.05	X.XXX': ±				