







Specifications:
Material And Finish:
Insulator:Nylon66 UL94V-0
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-25°~+85°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information
A63513S-XXX-X
1 2 3 4 5

- 1: — Series No.
2: — S: Straight
3: — No. of Positions
4: — A: Gold Flash
Q: Tin Plated
5: — A: In bag
B: In Tube
C: In Tray

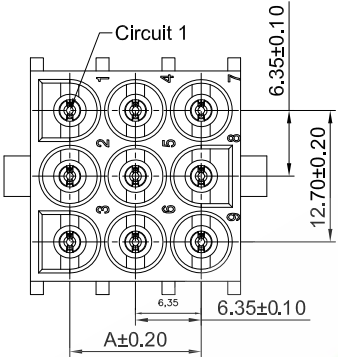

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
3x2P	6.35	13.97
3x3P	12.70	20.32
3x4P	19.05	26.67
3x5P	25.40	33.02

Unit: mm

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A63513S-XXX-X		HJBRIGHT ® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 6.35mm Pitch Wafer Straight Type		SHEET: 1/1			A4
2X				Kenry	X.X: ±0.20	X.X': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson	A001	APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 04-Jun-2015		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°						