

Specifications:**Material And Finish:**

Insulator:PBT UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:Gold Pated Over Nickel

Rating:

Current Rating:1.5 Amp

Voltage Rating:125V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Mechanical:

Durability:750 Cycles Min

Ordering Information**MJ014RM-8P8CX-1X-XX**

1 2 3 4 5 6 7 8 9

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — No. of Contact:
8:8 Contacts

5: — B:Gold Plated 3μ"(0.075μm)

C:Gold Plated 6μ"(0.15μm)

D:Gold Plated 10μ"(0.25μm)

E:Gold Plated 15μ"(0.375μm)

G:Gold Plated 30μ"(0.75μm)

6: — O:With Flange

1:W/O Flange




7: — A:In bag

B:In Tube


C:In Tray


8: — LED L Yellow

9: — LED R Green

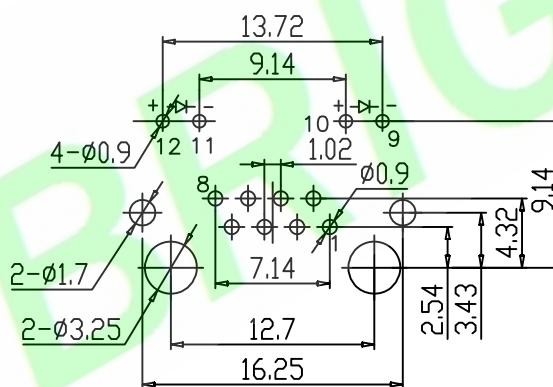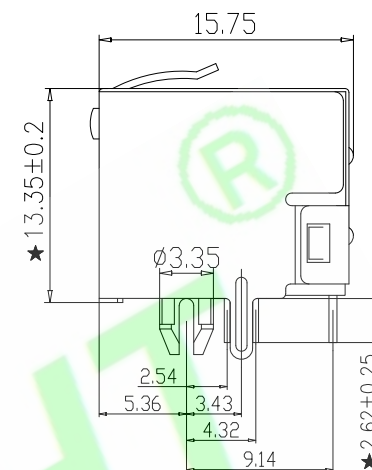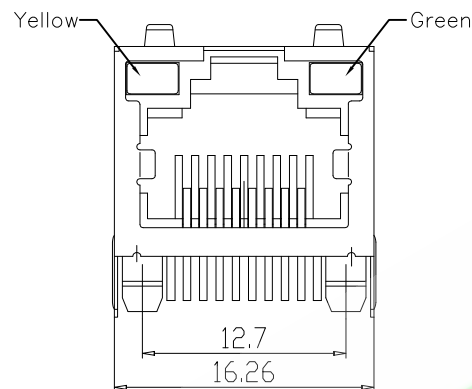

Recommended PCB Layout Tolerance:±0.05



5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : MJ014RM-8P8CX-1X-YG		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD1204-001				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 10P8C Modular jack LED Shielded With Filter		SHEET: 1/1		A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 13-Apr-2012		UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°					