

**Specifications:**

**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black  
 Contact:Brass  
 Plated:See Ordering Information

**Rating:**

Current Rating:3.0 Amp  
 Voltage Rating:250V AC/DC  
 Operating Temperature Range:-40~+105°C





**Electrical:**

Contact resistance:20m Ohm Max  
 Insulator resistance:1000M ohm min.  
 Withstanding Voltage:500V AC/Minute

**Ordering Information**

25411S-XXX113B-NX  
 1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash  
 H: Selective Gold Plated  
 T: 10u" Gold on contact, Matte tin on tail  
 S: Matte Tin Plated  
 Q: Tin Plated
- 5: — A: In bag  
 B: In Tube

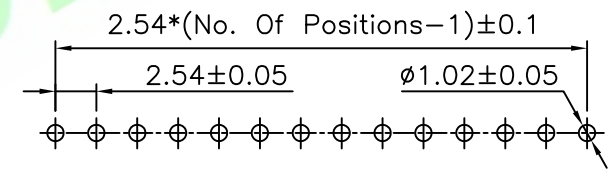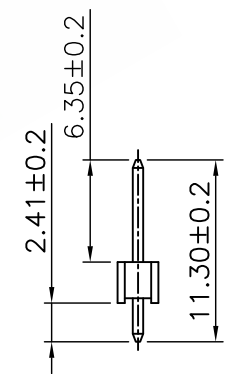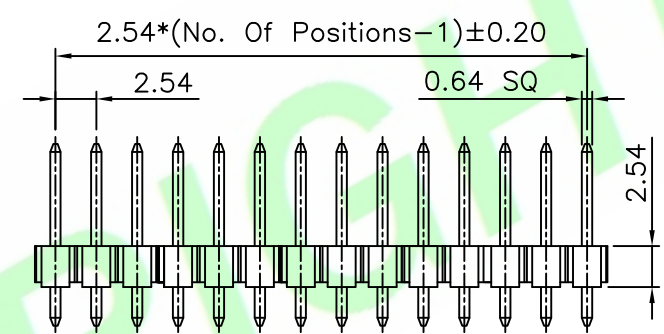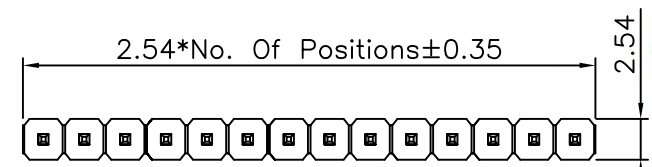

Recommended PCB Layout

5X			
4X			
3X			
2X			
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Kenry	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	X.: ±0.30	X': ±5.0°
	X.X: ±0.20	X.X': ±3.0°
	X.XX: ±0.15	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : 25411S-XXX113B-NX
DWG. NO.:
TITLE : 2.54mm Pitch Pin Header Straight Type
DATE: 09-Dec-2015

**HJBRIGHT®** 东莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1	<p>THIRD ANGLE PROJECTION</p>	<p><b>A4</b></p>
SCALE: 1:1		
UNIT: mm		