

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp
 Voltage Rating:150V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:


Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

20012R-XXX120-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
D:Gold 10u”
H:10u” Gold on Contact; Gold Flash on tail
Q:Tin Plated
- 5: — A:In bag
B:In Tube
C:In Tray

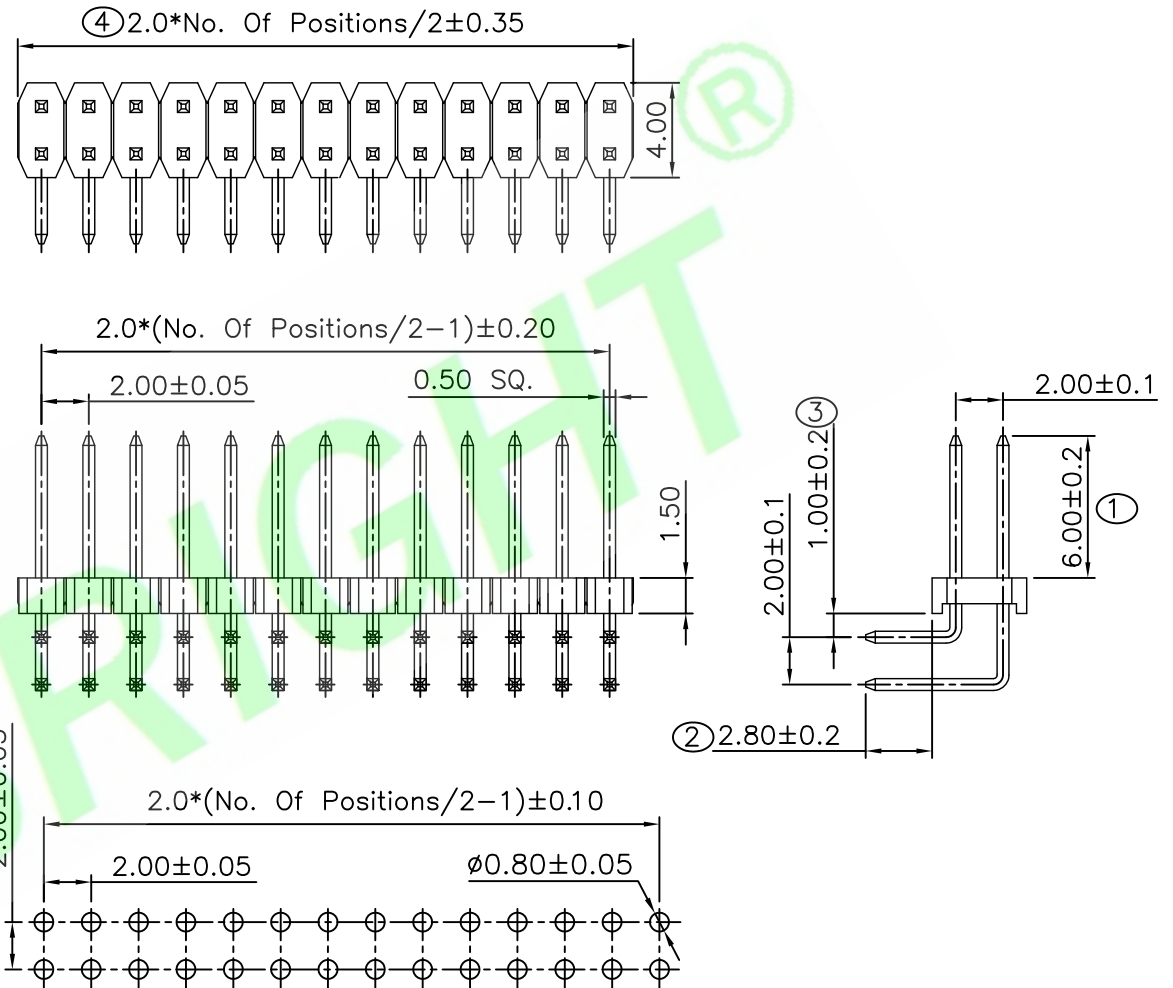

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 20012R-XXX120-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				Samsom	LINEAR	ANGLES	DWG. NO.: RD0808-01A		
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch		SHEET: 1/1
2X				Tony	X.X: ±0.20	X.X': ±3.0°	Pin Header R/A Type		SCALE:1:1
1X	ORIGINAL	Samsom		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 11-Jun-2009		UNIT:mm
REV	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°			THIRD ANGLE PROJECTION

A4