
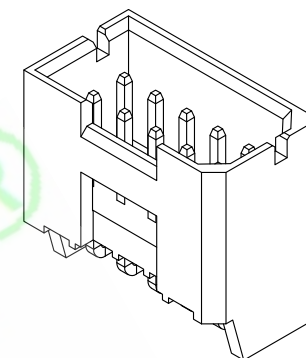


SPECIFICATIONS




Current Rating :3 Amps
 Insulator Resistance :5000 Megohms min.
 Dielectric Withstanding :AC 1000 V
 Operating Temperature :-40°C ~ +105°C
 Contact Material :Copper Alloy
 Pin Material :Brass
 Finished :Tin-plated
 Housing Material :Nylon66, UL94 V-0
 Color :White



Ordering Information

A2548R-XXX-01-X
 1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q: Tin Plated
- 5: — A:In bag
B:In Tube
C:In Tray

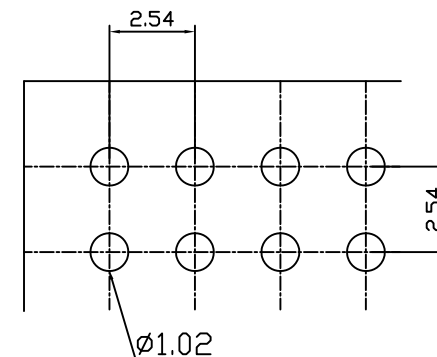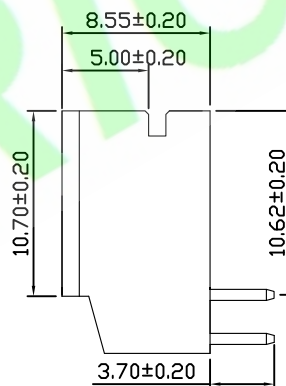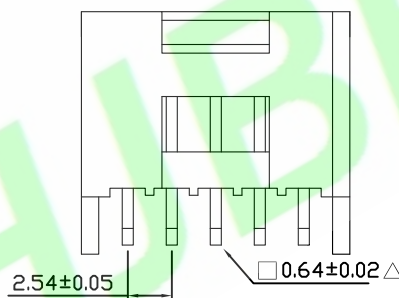

P. C. B Hole Layout

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO :A2548R-XXX-01-A	
4X				LINEAR	ANGLES	DWG. NO.:	
3X			CHKD.: Tony	X.:	X°:	TITLE : Pitch2.54 H:14.0 2*5P Nylon-66	
2X				X.X:	X.X°:	(環保材料)	
1X	ORIGINAL	Samson	APPD.: Billy	X.XX: ±0.05	X.XX°:	DATE: 18-Dec-2008	
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.02	X.XXX°:	UNIT: mm	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4