Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Terminal:Copper alloy

Retention Leg:Copper alloy,plated NI

Shell: Zinc Alloy,plated NI

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°C~+85°C

Electrical:

Contact resistance:35m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

FCN127R-XXX-XX

1 2 3 4 56

1:——Series No.

2:——R:Right angle Type

3:——No. of Positions

4:——1: Gold Flash Selective Plating

2: 5U" Gold Selective Plating

3: 10U" Gold Seledtive Plating

5: 15U" Gold Selective Plating

6: 30U" Gold Selective Plating

5:——0: without Nut

1: with Nut

6:——B:In Tube

C:In Tray

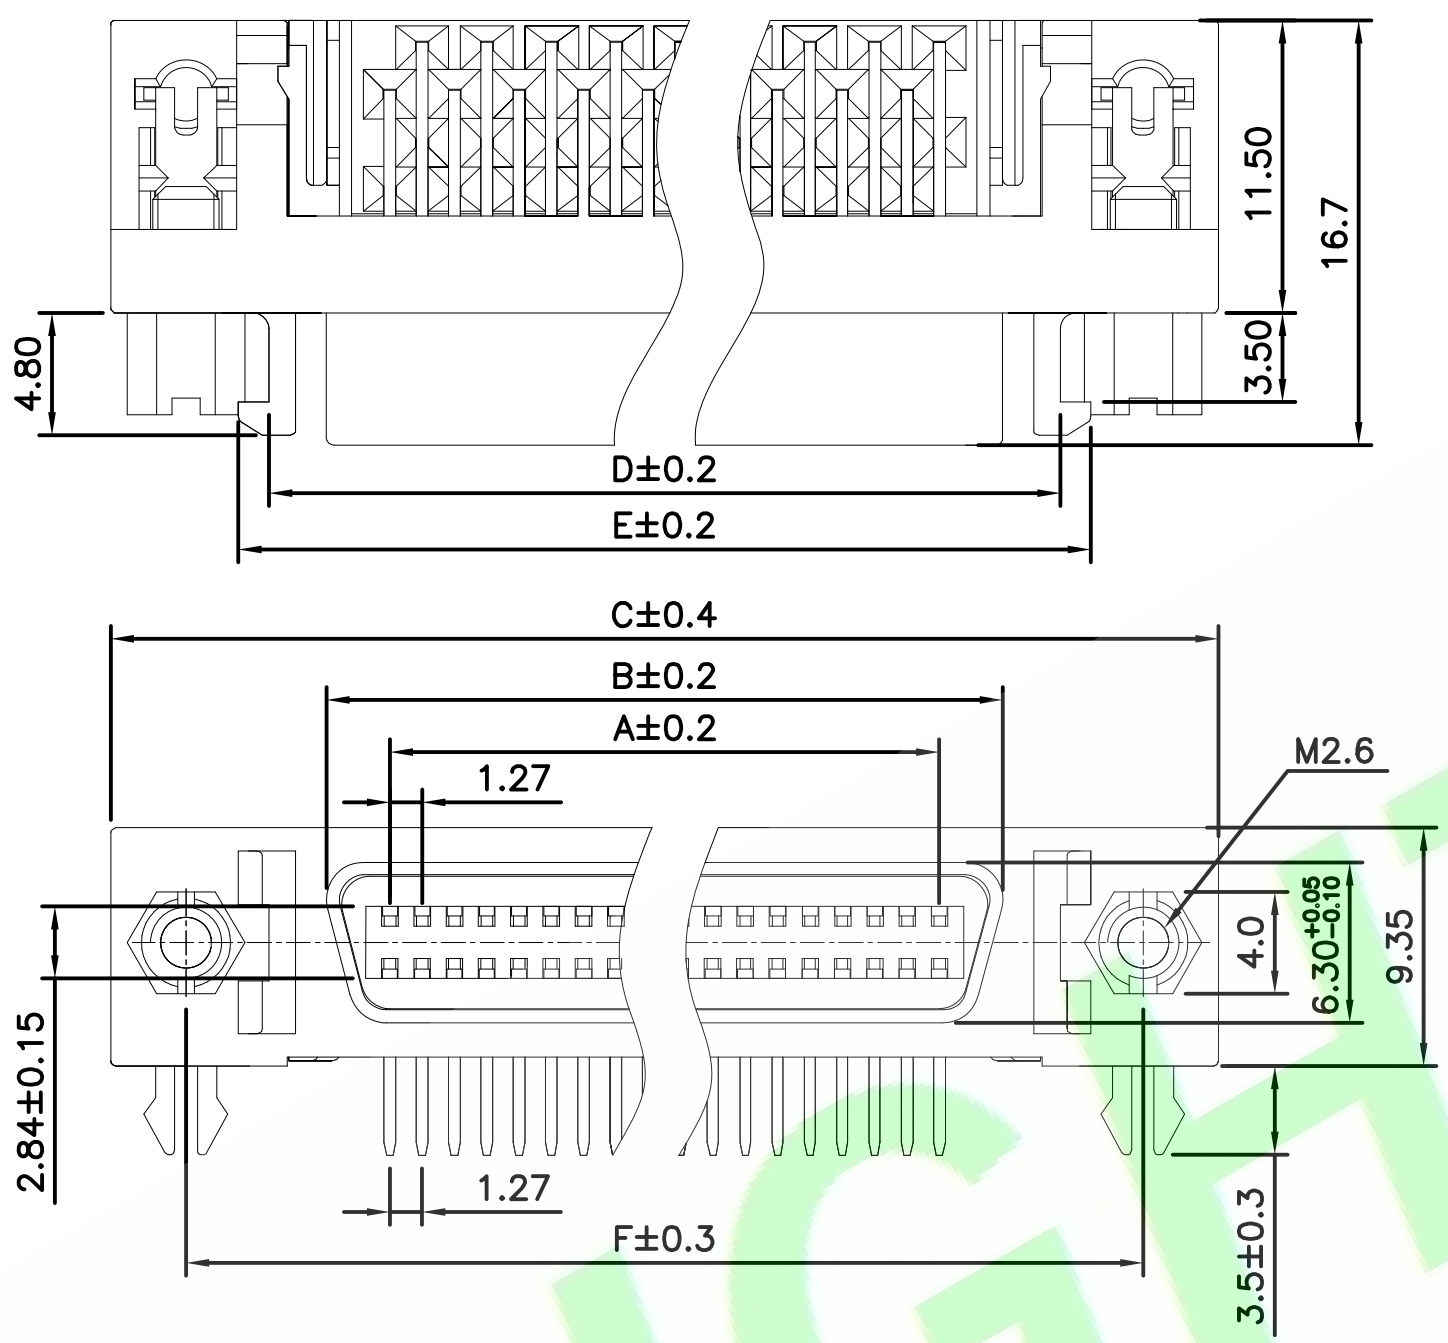

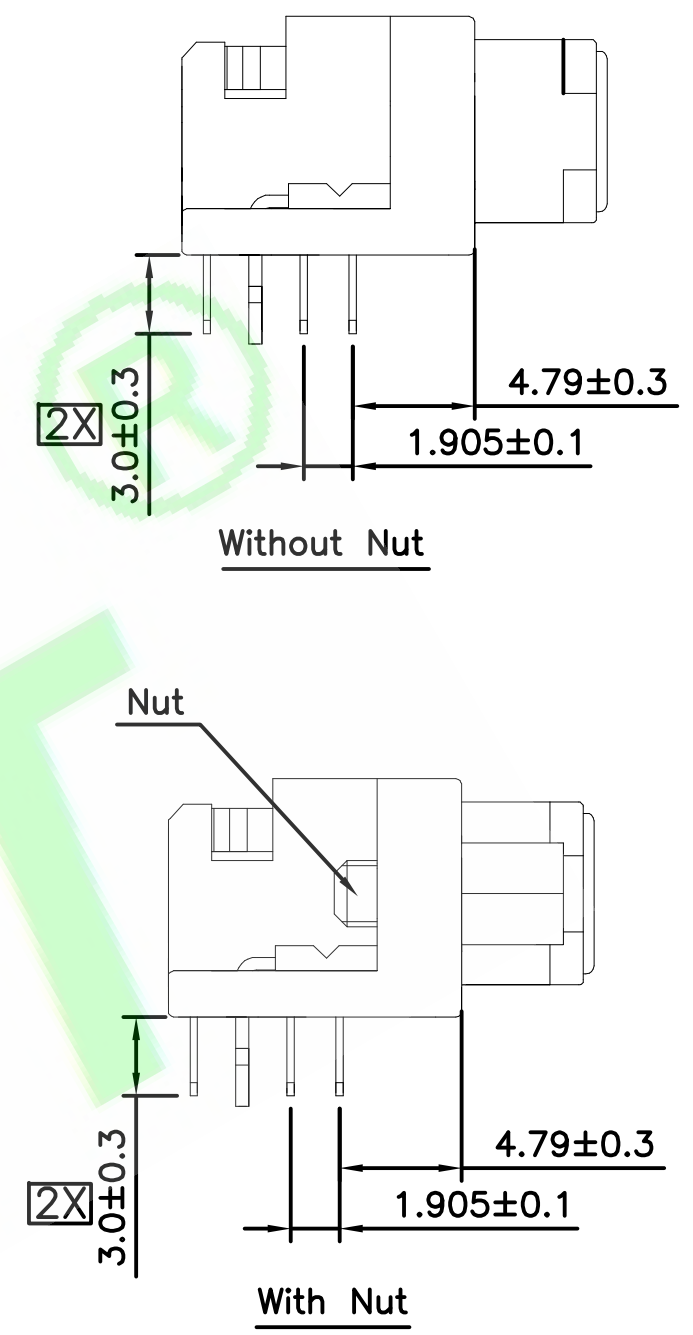

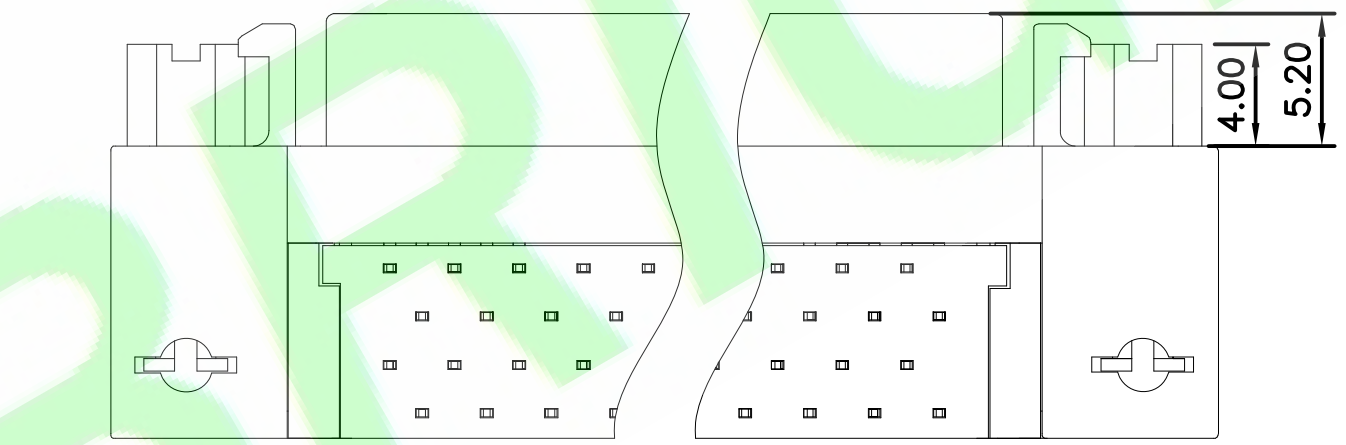

PIN数	DIM					
	A	B	C	D	E	F
20	11.43	16.43	33.38	20.95	23.35	27.45
26	15.24	20.24	37.19	24.76	27.16	31.26
36	21.59	26.59	43.51	31.11	33.51	37.61
50	30.48	35.48	52.43	40.00	42.40	46.50

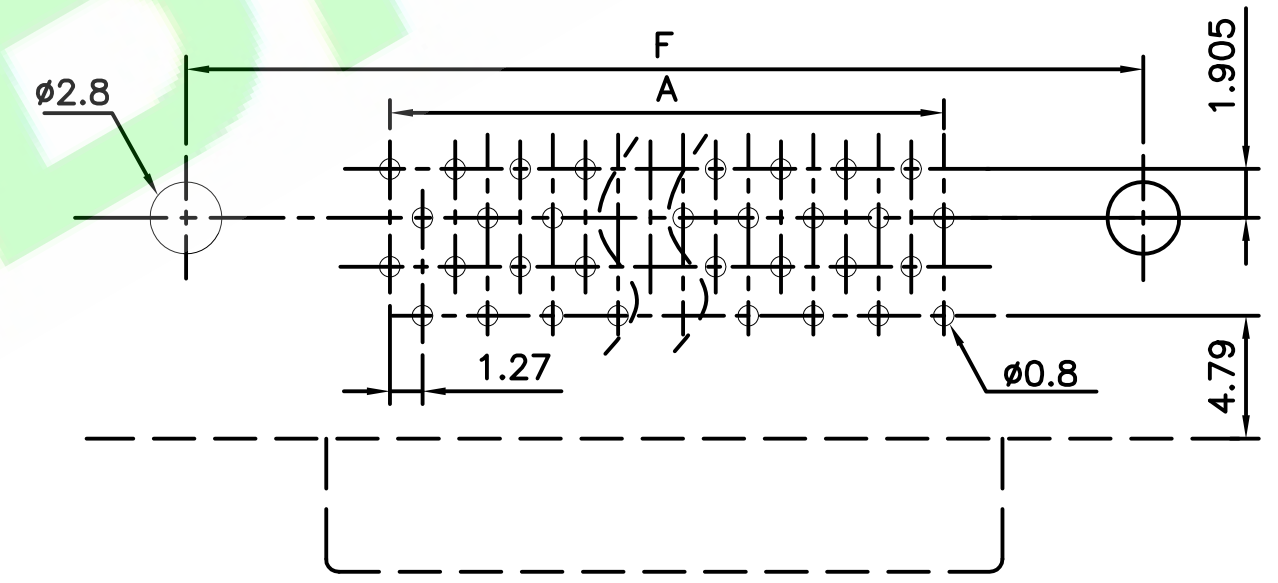

26P\50P PCB Layout

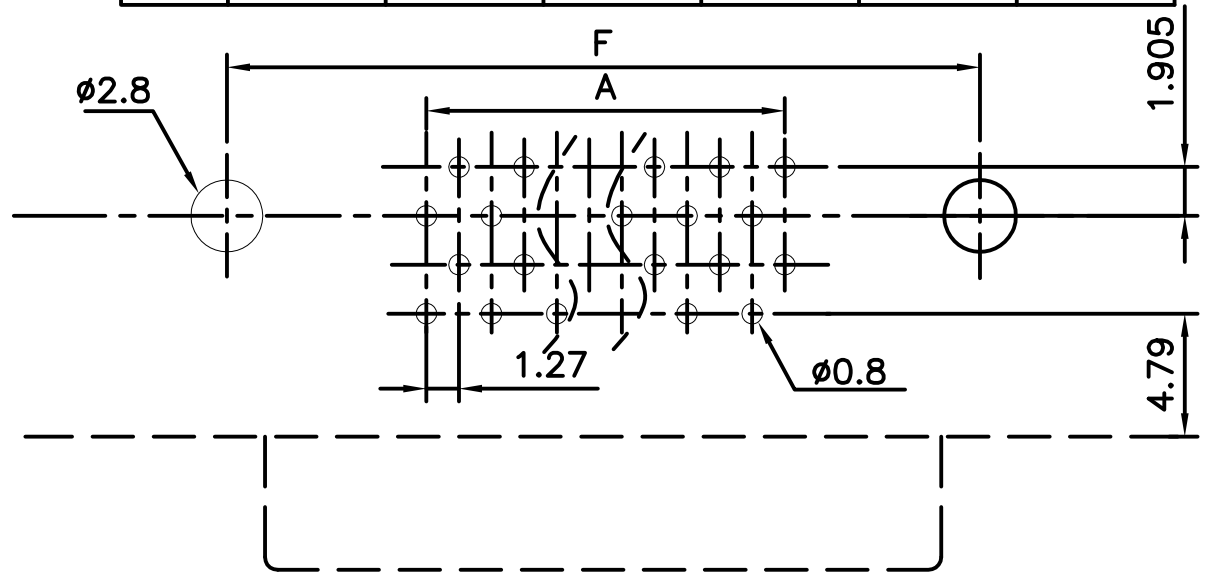

20P\36P PCB Layout

RoHS Compliant

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X	变更焊脚的长度为3.0mm	Kenry	17-May-2016
1X	ORIGINAL	Kenry	

DR.BY.: Kenry

CHKD.: Tony

APPD.: Billy

GENERAL TOLERANCE:			
LINEAR		ANGLES	
X.:		X°:	±5.0°
X.X:	±0.30	X.X°:	±3.0°
X.XX:	±0.20	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : FCN127R-XXX-XX

DWG. NO.:

TITLE : SCSI Connector Female R/A Type

DATE: 30-Aug-2014

HJBRIGHT 東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm

THIRD ANGLE PROJECTION

A4