

RoHS Compliant

备注:

材质:磷青铜, SQ 0.63mm, 鱼眼型

特性:

1. 可焊性:在260℃之锡炉, 沾锡3~5s后取出, 沾锡面积不小于95%.

Ordering Information





DY-062A-XXXX-XX-LD

1 2 3

1: — Series No.

2: — Length Code

3: — Plated Code

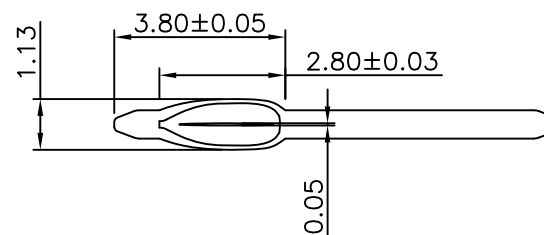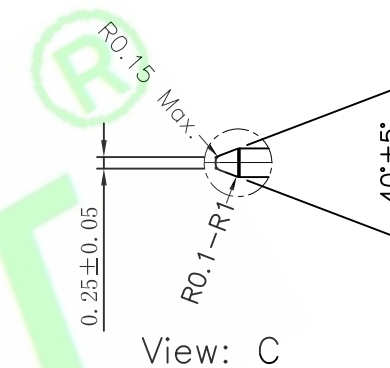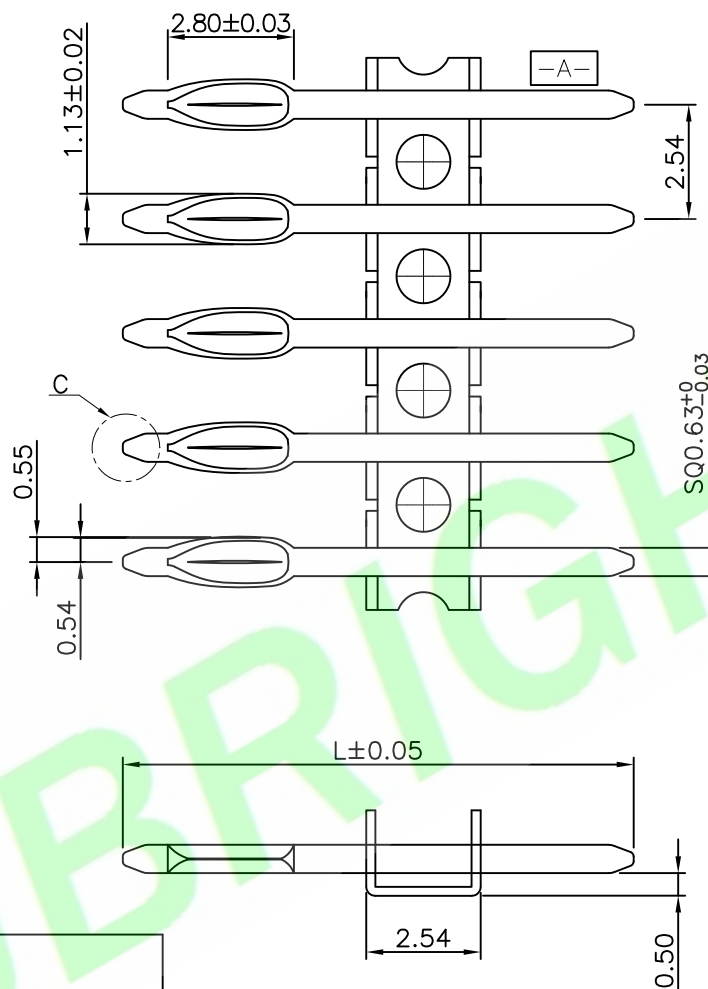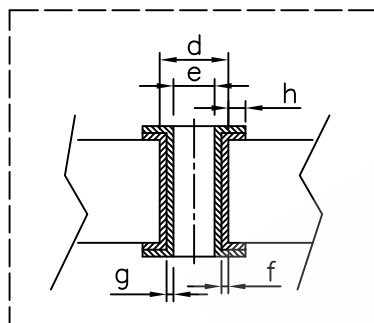

Note	Plated-through hole	
d	Diameter of the hole prior to plating	ø1.15±0.025mm
e	Recommended diameter of the finished hole after plating and finish.	ø1.025±0.05mm
f	Copper thickness of the tube	25μm~35μm
g	Final plating	25μm~40μm
h	Pad width	0.15 mm Min.

5X				DR.BY.:	
4X				Kenry	
3X				CHKD.:	
2X				Tony	
1X	ORIGINAL	Kenry		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.15	X°: ±5.0°
X.X: ±0.10	X.X°: ±3.0°
X.XX: ±0.05	X.XX°: ±1.0°

PART NO : DY-062A-XXXX-XX-LD
DWG. NO.:
TITLE : 0.62 鱼眼方针
DATE: 25-Sep-2015

HJBRIGHT 东莞市华晶电子有限公司	
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
SHEET: 1/1	THIRD ANGLE PROJECTION
SCALE: 1:1	
UNIT: mm	

A4