

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black
 PIN:Brass
 SolderTabs:Brass
 Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-25~+80°C

Electrical:





Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 After environmental Testing:20m Ohm Max
 Withstanding Voltage:1500V AC/Minute

Ordering Information

A30302H-XXS-01-X

1 2 3 4 5

- 1: Series No.
- 2: H:Horizontal SMT Type
- 3: No. of Positions
- 4: S:Matte Tin Plated
- 5: B:In Tube
 C:In Tray
 F:W/Cap In Tape&Reel

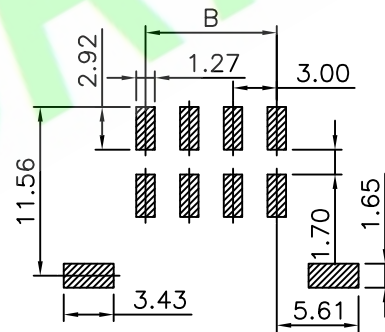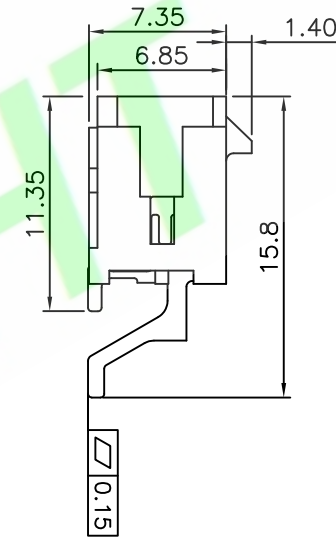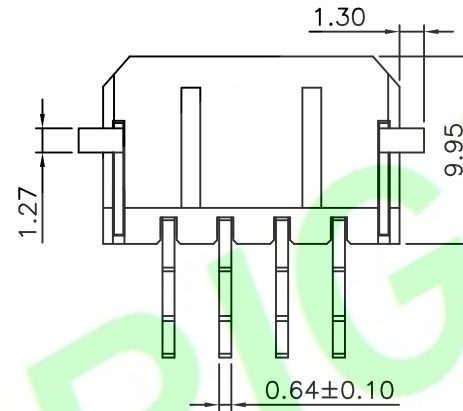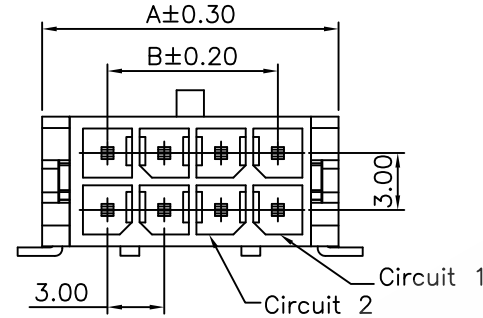

Recommended PCB Layout

Circuits	Dimension mm	
	A	B
02	6.65	---
04	9.65	3.00
06	12.65	6.00
08	15.65	9.00
10	18.65	12.00
12	21.65	15.00
14	24.65	18.00
16	27.65	21.00
18	30.65	24.00
20	33.65	27.00
22	36.65	30.00
24	39.65	33.00

5X			
4X			
3X			
2X			
1X	ORIGINAL	Bruce	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY: Bruce	GENERAL TOLERANCE:		PART NO : A30302H-XXS-01-X
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	X.: ±	X': ±	TITLE :
	X.X: ±0.30	X.X': ±	3.0mm Pitch Wafer Horizontal SMT Type
	X.XX: ±0.20	X.XX': ±	DATE: 10-Dec-2017
	X.XXX: ±0.10	X.XXX': ±	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4