




Note:

1.Material : Copper alloy [C19010], SPRING HARDNESS

2.FINISHES:

SECTION "X": POST PLATED 1 – 3 μm MATTE TIN OVER 1–3 μm NICKEL

SECTION "Y": TOP LAYER, GOLD PER ASTM B488, TYPE 1, CODE C,
0.8 – 2 μm THICKNESS.

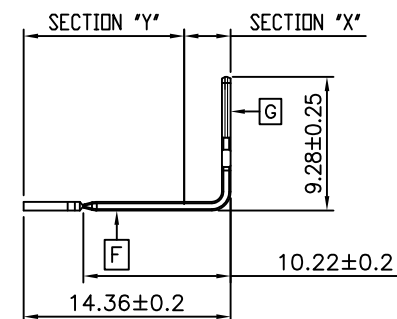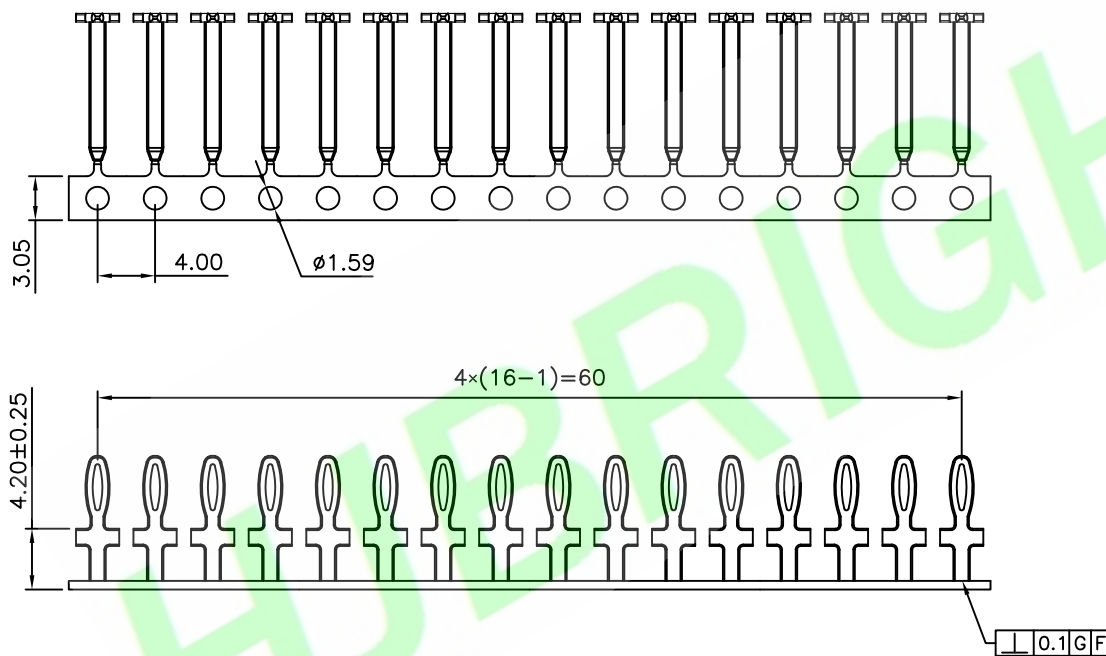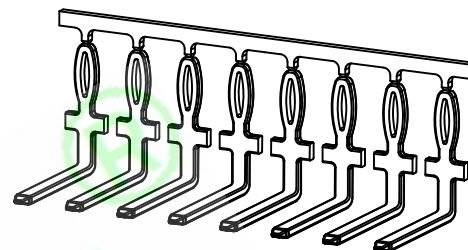



5X			
4X			
3X			
2X	Change The Material Fixed Position	Kenry	6-Jun-2016
1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.:	Kenry
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : CTCFTD3CPP0-LF-S
DWG. NO.:
TITLE : FOR CTCF SERIES Contact Bending Mode
DATE: 27-Jan-2016


HJBRIGHT [®] 东莞市华晶电子有限公司		
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1		
SCALE: 1:1		
UNIT: mm		
THIRD ANGLE PROJECTION		
A4		




产品

备注:

- 1、将端子裁16PCS为一段, 30段(即480PCS)使用PE袋(PE10-6)包装;
- 2、每3袋装一小盒, 即1440PCS/盒, 贴上内标签;
- 3、20盒(5层)产品装一个纸箱(28800PCS), 纸箱规格: ZX260-178-115;
- 4、封箱方式(如下图所示): 外箱四周使用透明的封箱胶带, 并封成王字型.

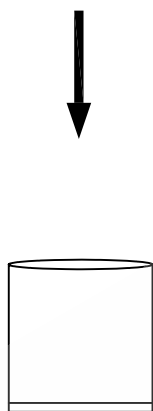


PE袋




内标签

盒子

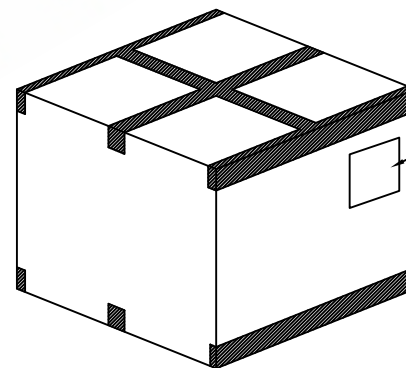

外箱标签

纸箱

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : CTCFTD3CPP0-LF 包装图	HJBRIGHT® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			SHEET: 1/1 SCALE: 1:1 UNIT: mm	 THIRD ANGLE PROJECTION	A4
4X				Kenry	LINEAR	ANGLES	DWG. NO.:						
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE :						
2X	Change The Material Fixed Position	Kenry	6-Jun-2016	Tony	x.x: ±0.20	x.x': ±3.0°	CTCFTD3CPP0-LF 包装图						
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 27-Jan-2016						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°							