

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**12762M-XXX078-1X**

1 2 3 4 5

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash

E:3u" Gold on contact;Matte Tin on tail

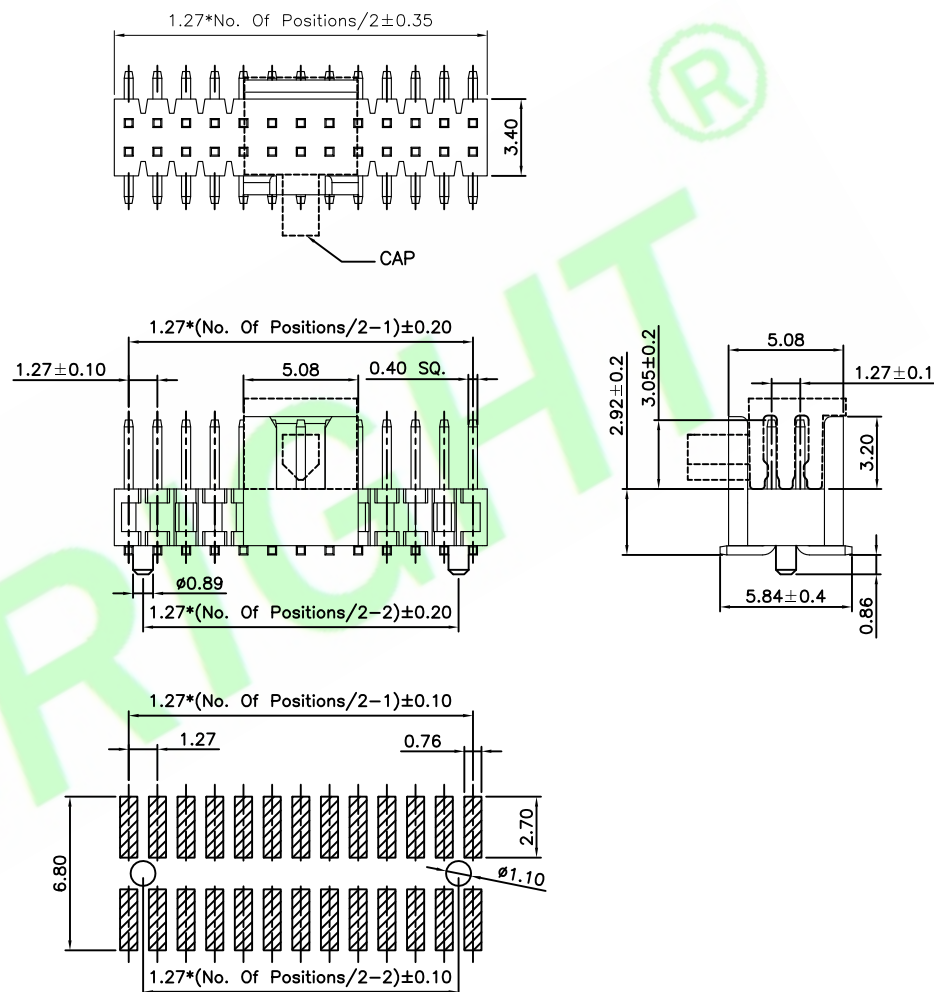
H:Gold Flash on contact;Matte Tin on tail

T:10u" Gold on contact;Matte Tin on tail

5:— B:In Tube

E:W/Cap In Tube

F:W/Cap In Tape&Reel

Recommended PCB Layout
(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 12762M-XXX078-1X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED SHEET: 1/1 SCALE: 1:1 UNIT: mm  THIRD ANGLE PROJECTION A4		
4X					LINEAR	ANGLES	DWG. NO.:				
3X		Samson		CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :				
2X					x.x: ±0.20	x.x': ±3.0°	1.27mm Pitch Pin Header SMT Type				
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 7-Sep-2013				

A4