RoHS Compliant

Specifications:
Material And Finish:
Insulator:PA6T UL94V–0 Color:Black
Contact:BRASS

Rating:
Current Rating:3 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:–40°~+125°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/DC

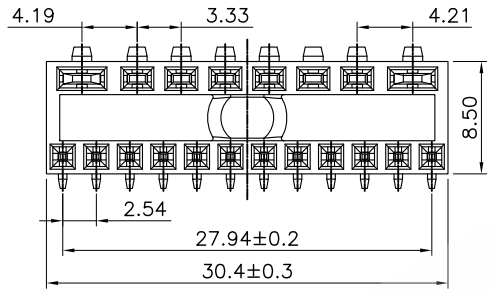



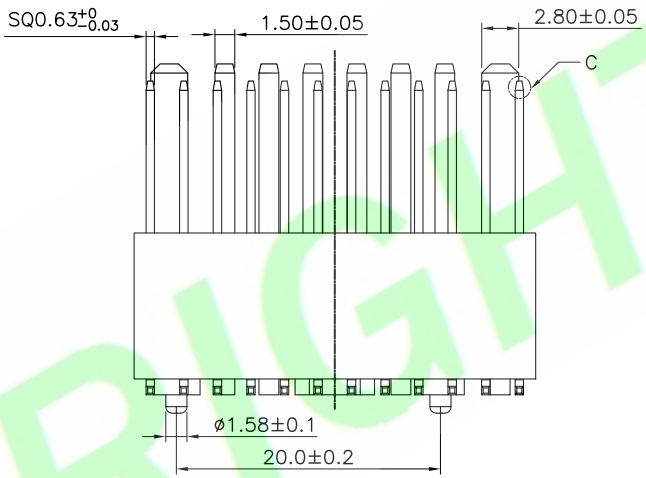

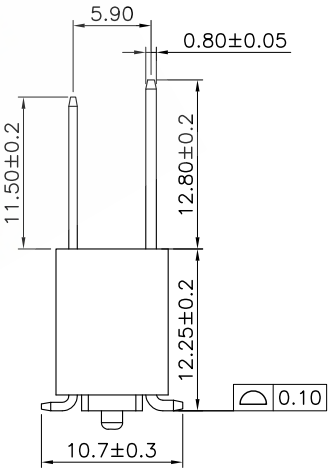

Ordering Information
25491M–20S254–NF
1 2 3 4 5

1: —— Series No.
2: —— M:SMT Type
3: —— No. of Positions
4: —— S:Matte Sn 2.54~5.08um over 1~2.54um Ni
5: —— Package:
F:In Tape&Reel

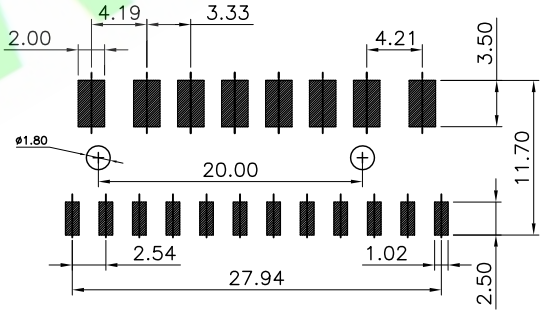

Recommended PCB Layout
(Tolerance:0.05mm)



View:C
5:1

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X	塑胶加胶防歪斜	Aaron	20181127
1X	ORIGINAL	Aaron	

DR.BY.: Aaron
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:	LINEAR	ANGLES
X.:	±0.30	X°: ±5.0°
X.X:	±0.20	X.X°: ±3.0°
X.XX:	±0.15	X.XX°: ±2.0°
X.XXX:	±0.10	X.XXX°: ±1.0°

PART NO : 25491M–20S254–NX
DWG. NO.:
TITLE : 2.54mm Pitch Pin Header SMT Type
DATE: 31–Oct–2018

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT®