

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12762S-XXXXXX-X

1 2 3 4 5

1: — Series No.

2: — R/R/A Type

3: — No. of Positions

4: — A:Gold Flash

H:Gold Flash on contact;Matte Tin on tail

Q:Tin Plated

T:10u" Gold on contact;Matte Tin on tail




5: — A:In bag

B:In Tube


C:In Tray

E:W/Cap In Tube

F:W/Cap In Tape&Reel

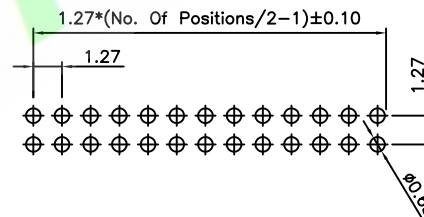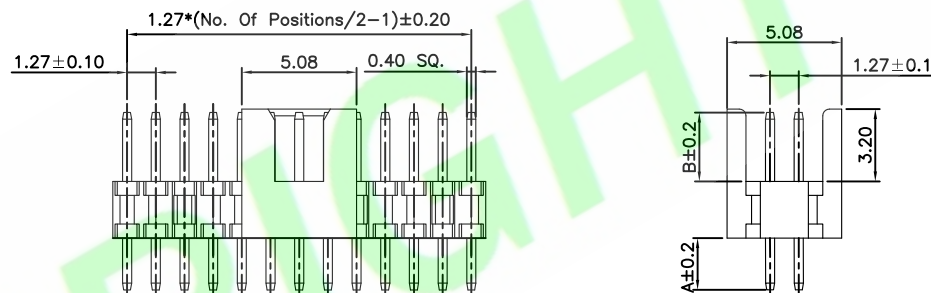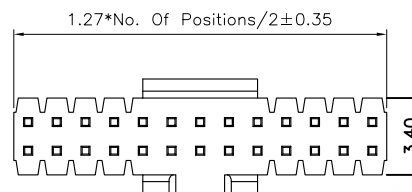

Recommended PCB Layout
(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 12762S-XXXXXX-X	HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header straight Type	SHEET: 1/1		A4
2X					x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 7-Sep-2013	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				