


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
S: Matte Tin
5:— A: In bag
B: In Tube
C: In Tray

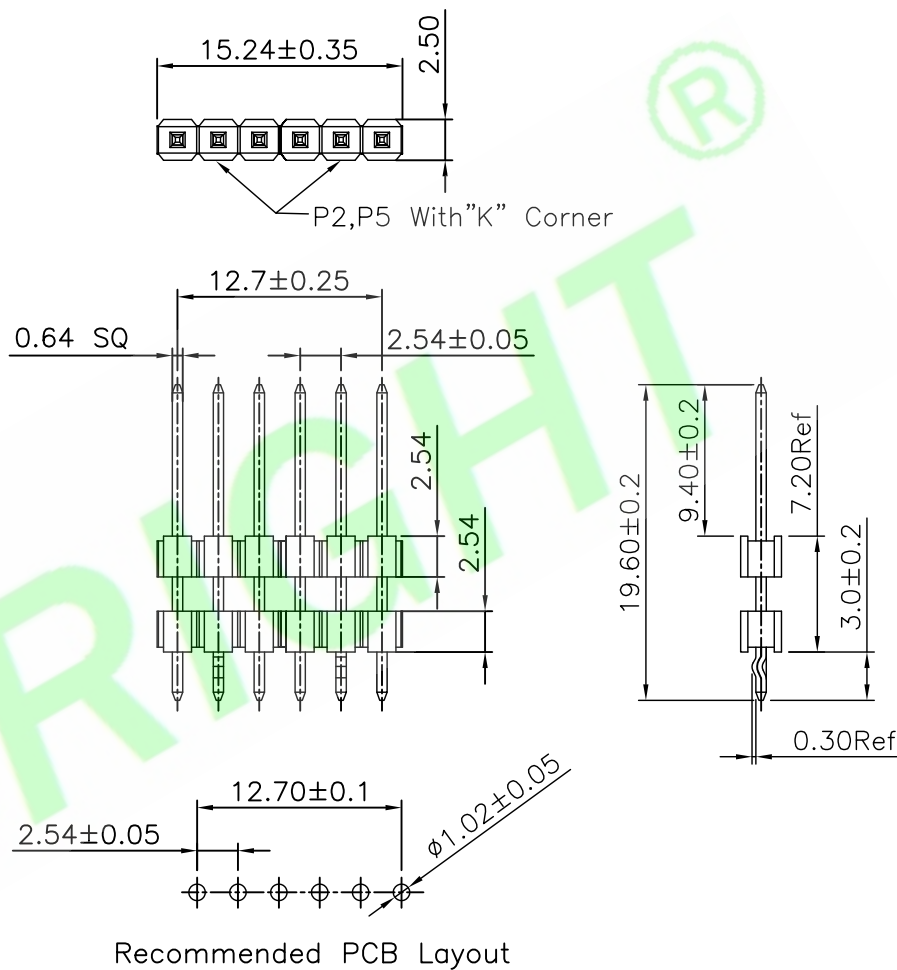

5X			DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : 254112S-06X196-NX		HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED							
4X				LINEAR		ANGLES	DWG. NO.:								
3X			CHKD.: Tony	x.: ±0.30	x°: ±5.0°	TITLE : 2.54mm Pitch Pin Header Straight Type		SHEET: 1/1			A4				
2X				x.x: ±0.20	x.x°: ±3.0°			SCALE: 1:1							
1X	ORIGINAL	Bruce	APPD.: Billy	x.xx: ±0.15	x.xx°: ±2.0°	DATE: 19-Mar-2017		UNIT: mm				THIRD ANGLE PROJECTION			
REV.	DESCRIPTION	DR.BY	ECN. NO												
1		2		3		4		5		6		7		8	