

Specifications:**Material And Finish:**

Insulator:High Temperature Plastic UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°C~+105°C

Electrical:

Contact resistance:20m Ohm Max

Ordering Information**12712S-12X030-NF**

1 2 3 4 5

1:— Series No.

2:— S: Straight Type

3:— No. of Positions


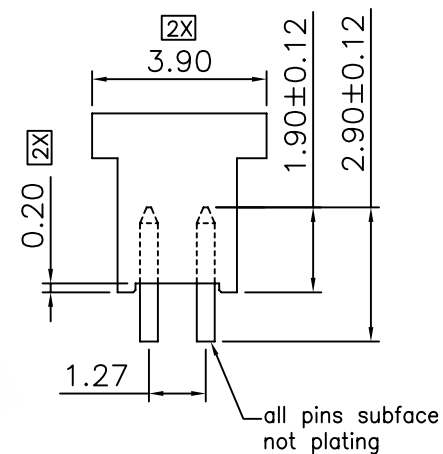
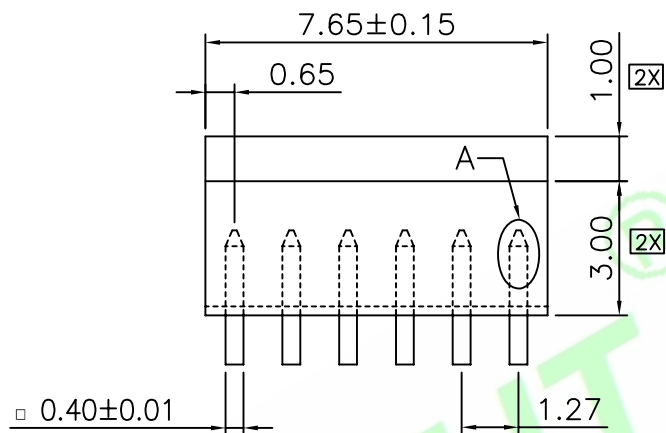
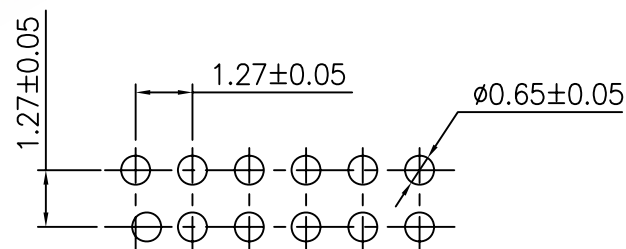
4:— A: Gold Flash

B: 2u" Gold on contact; Gold flash on tail

D: 10u" Gold on contact; Gold flash on tail

Q: Tin Plated

5:— F: In Tape

Detail A
Scale: 1:1

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : 12712S-12X030-NF	HJBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED A4		
4X					CHKD.: Tony	LINEAR	ANGLES			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°			
2X	尺寸變更	Aaron	20170617		x.x: ±0.20	x.x': ±3.0°	DATE: 30-Nov-2016			
1X	ORIGINAL	Kenry			x.xx: ±0.15	x.xx': ±2.0°		SHEET: 1/1	SCALE: 1:1	UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				