

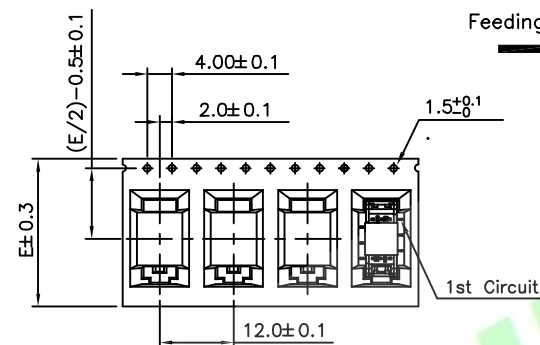


RoHS Compliant

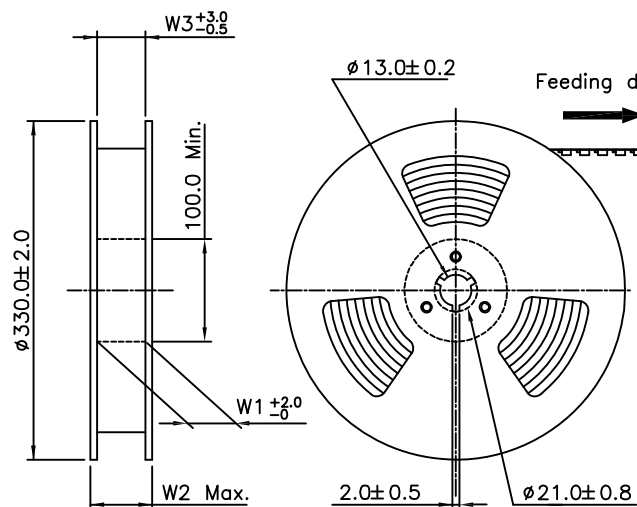


For With Latch Type

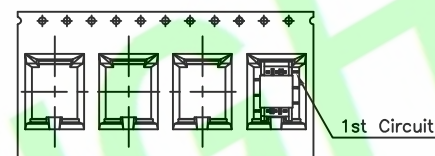


For Without Latch Type

WIDTH : 24 mm Carrier

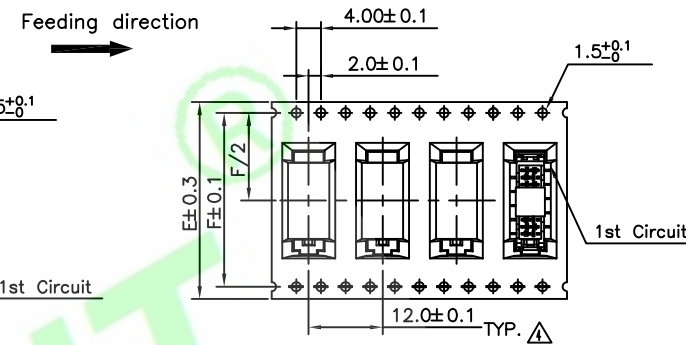


For With Latch Type

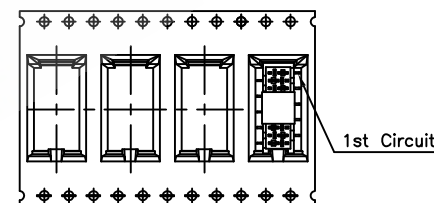

For Without Latch Type

WIDTH : 32.44.56 mm Carrier

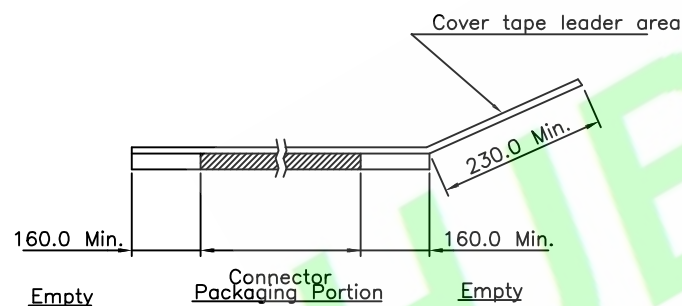

NOTES:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$.
2. Carrier camber not to exceed 1 mm in 100 mm.
3. Material :Transparent Anti-static Polysyrene.
4. All dimensions meet EIA-481-3 requirements.
5. Thickness : $0.40 \pm 0.05\text{mm}$.
6. Packing length per 22" Reel : 30.6 Meters.
7. Component load per 13" Reel : 800 pcs.

Circuits		Dimension					Packing (Reel/Caton)
		E	F	W1	W2	W3	
4~8	4~8	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
10~14	10	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
16~22	12~20	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
24~26	22~26	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

5X				DR.BY.: Bruce
4X				CHKD.: TONY
3X				APPD.: Billy
2X				
1X	ORIGINAL	Bruce		
REV.	DESCRIPTION	DR.BY	ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±1.0°	
X.X: ±1.0°	
X.XX: ±1.0°	
X.XXX: ±1.0°	

PART NO : DS2541M-XXS-XX-F
DWG. NO.:
TITLE : 包装图
DATE: 25-Apr-2013

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
SCALE: 1:1		
UNIT: mm		

A4