








No. (编号)	CODE (端口)	NAME (名称)	
A		FAKRA MALE SMB 50Ω FOR PCB	BLACK
B		FAKRA MALE SMB 50Ω FOR PCB	WHITE
C		FAKRA MALE SMB 50Ω FOR PCB	BLUE
D		FAKRA MALE SMB 50Ω FOR PCB	PURPLE
E		FAKRA MALE SMB 50Ω FOR PCB	GREEN
F		FAKRA MALE SMB 50Ω FOR PCB	BROWN
G		FAKRA MALE SMB 50Ω FOR PCB	GREY
H		FAKRA MALE SMB 50Ω FOR PCB	VIOLET
I		FAKRA MALE SMB 50Ω FOR PCB	BEIGE
K		FAKRA MALE SMB 50Ω FOR PCB	CURRY
L		FAKRA MALE SMB 50Ω FOR PCB	CARMINE RED
M		FAKRA MALE SMB 50Ω FOR PCB	PASTEL ORANGE
N		FAKRA MALE SMB 50Ω FOR PCB	PASTEL GREEN
Z		FAKRA MALE SMB 50Ω FOR PCB	WATER BLUE



PCE开孔参考图



ELECTRICAL CHARACTERISTICS(电器特性):

Impedence(特性阻抗)

50Ω

Frequency range(频率范围)

0-4GHz (Usable up to 6GHz)

V. S. W. R (电压驻波比)

≤1.3

Insertion Loss(插入损耗)

≤0.3dB

Insulation resistance(绝缘电阻)

1000MΩ mini

Center contact resistance(中心接触电阻)


<20mΩ

Working voltage(工作电压)

≤335V voltage

Dielectric withstanding votage(介质承受电压)

>1000Voltage

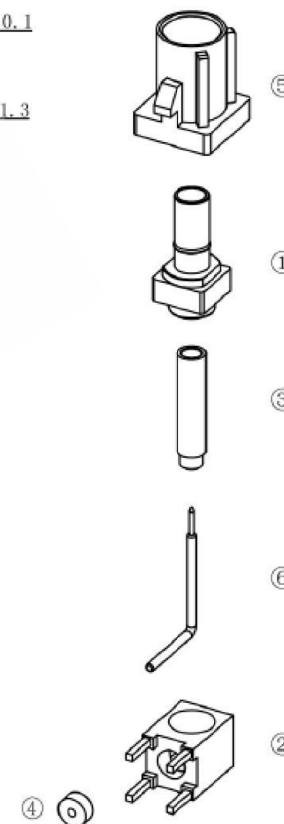

⑥	CONTACT PIN(触针)	6643-PIN 黄铜镀金	1PCS
⑤	SHELL(胶壳)	6648-SHELL PA66+30%玻纤 紫色	1PCS
④	INSULATOR(绝缘子)	6063-PTFE2 白色	1PCS
③	INSULATOR(绝缘子)	6643-PTFE 白色	1PCS
②	BODY2(主体)	6643-BODY2 黄铜镀锡, 方头主体	1PCS
①	BODY1(主体)	6643-BODY1 黄铜镀镍, 圆柱主体	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

5X				DR.BY:	
4X				Samson	
3X				CHKD.:	
2X				Tony	
1X	ORIGINAL	Samson		APPD.:	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	

GENERAL TOLERANCE:

LINEAR

ANGLES

X.: ±0.10 X': ±2.0°

X.X: ±0.05 X.X': ±1.0°

X.XX: X.XX':

X.XXX: X.XXX':

PART NO : HJ-M6643-001

DWG. NO.:

TITLE :

FAKRA MALE SMB 50Ω FOR PCB

DATE: 10-Oct-2017

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4