

Specifications:

Material And Finish:
 Insulator:LCP UL94V-0 Color:Natural
 Contact:Phosphor Bronze
 Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp
 Voltage Rating:200V AC/DC
 Operating Temperature Range:-25~+85°C

Electrical:


Contact resistance:40m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

A1006H-XXX-01-D

1 2 3 4 5

- 1: Series No.
- 2: H:Horizontal SMT Type
- 3: No. of Positions
- 4: A:Gold Flaash
Q: Tin Plated
S:Matte Tin Plated
- 5: D:In Tape&Reel

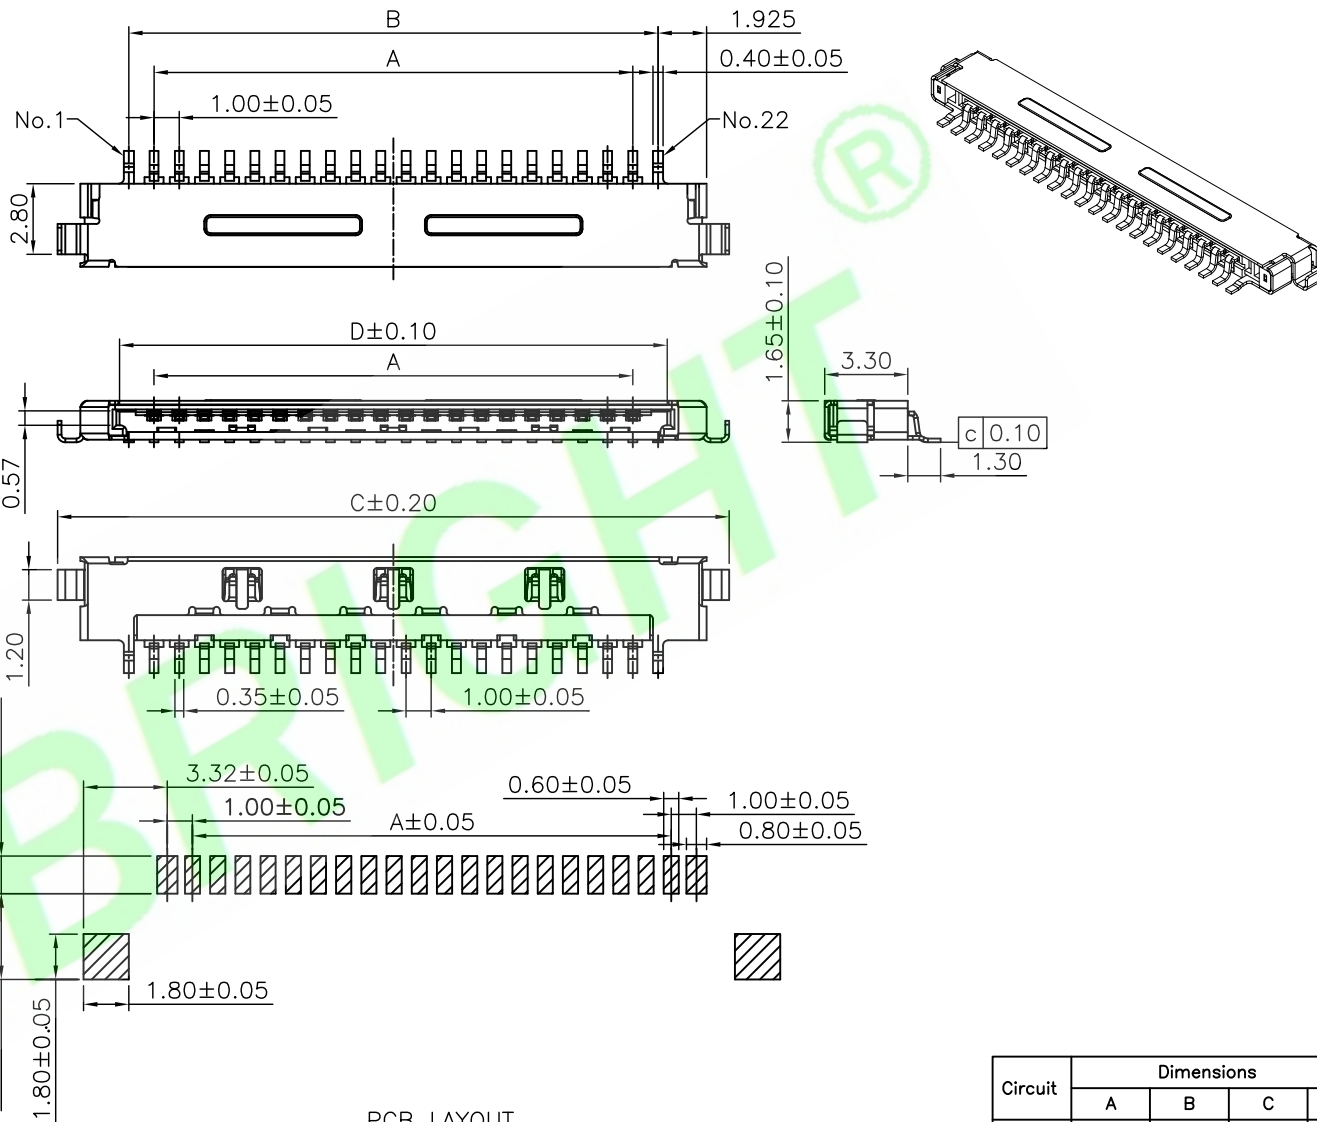

PCB LAYOUT

Circuit	Dimensions			
	A	B	C	D
20	19.00	21.00	26.65	22.00
30	29.00	31.00	36.65	32.00

5X			DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : A1006H-XXX-01-D	
4X				LINEAR	ANGLES	DWG. NO.:	
3X			CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE :	
2X				X.X: ±0.25	X.X': ±3.0°	1.0mm Pitch Wafer Horizontal SMT Type	
1X	ORIGINAL	Samson	APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 02-Jun-2017	
REV.	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±0.10	X.XXX': ±1.0°	UNIT: mm	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4