

Specifications:
 Material And Finish:
 Insulator:PBT,UL94V-0,Color:Natural

Rating:
 Current Rating:1.0 Amp
 Voltage Rating:50V AC/DC
 Operating Temperature Range:-25°C~+85°C






Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:100M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information


A1009H-XXP

1 2 3

- 1: — Series No.
- 2: — H:Housing
- 3: — No. of Positions

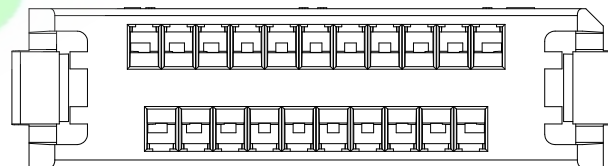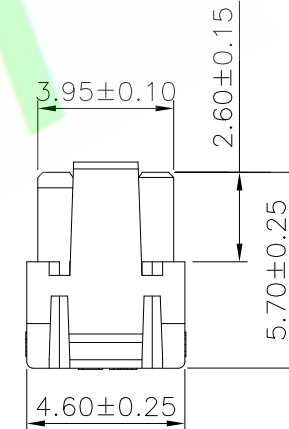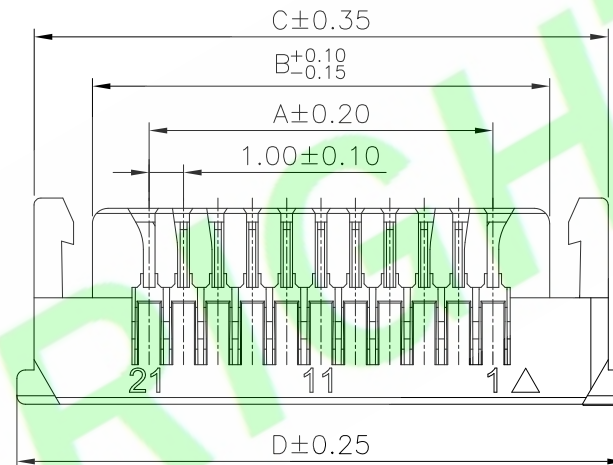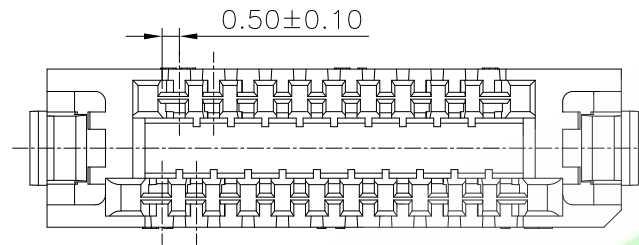

Circuits	Dimensions			
	A	B	C	D
21	10.00	13.30	16.70	17.70
31	15.00	18.30	21.70	22.70

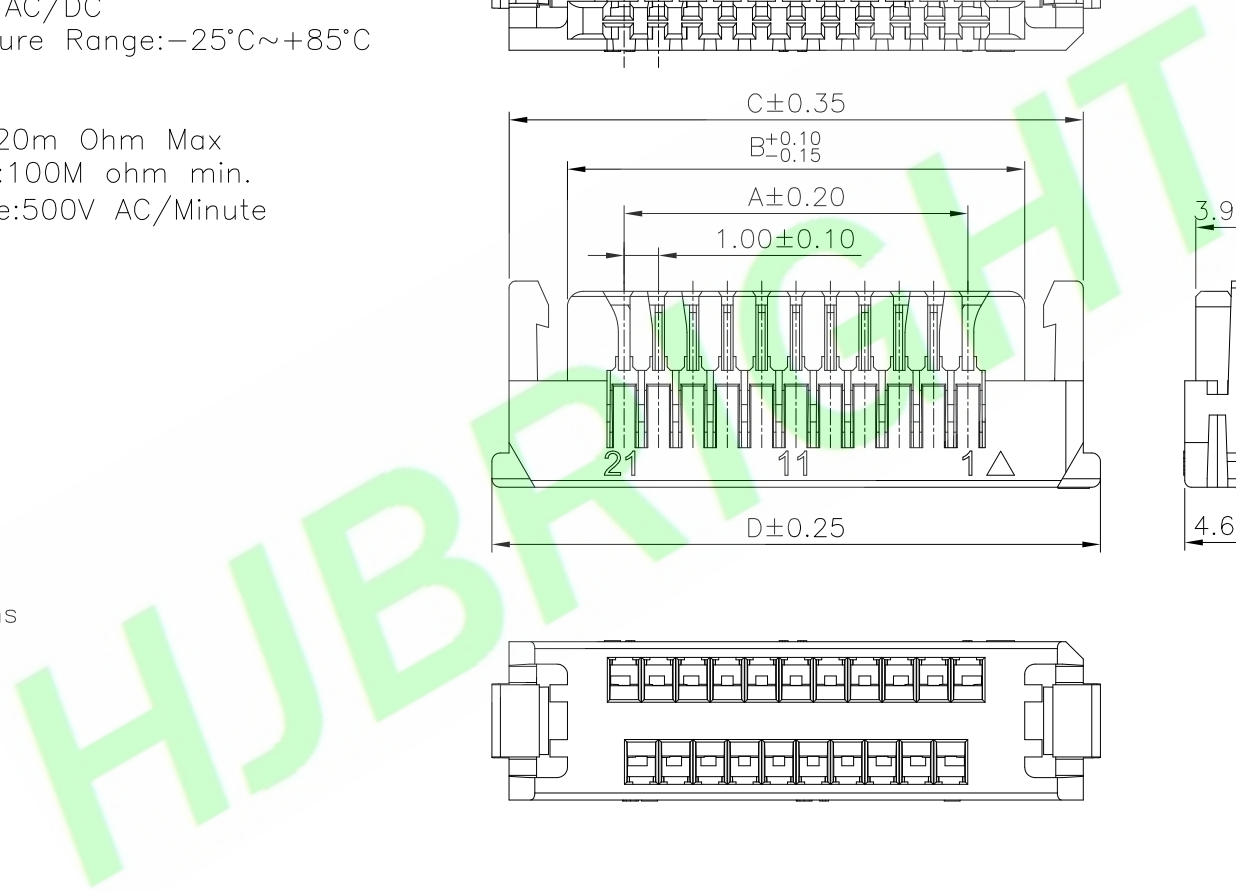

5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:	
CHKD.: Tony	LINEAR	ANGLES
APPD.: Billy	X.: ±0.30	X': ±5.0°
	X.X: ±0.20	X.X': ±3.0°
	X.XX: ±0.10	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A1009H-XXP
BURY P/N:
TITLE : 1.0mm Pitch Housing
DATE: 05-Oct-2017

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4