

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0,Color:Natural

Shell:Stainless

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:50V AC/DC

Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information






A1026H-XXP

1 2 3

1: — Series No.

2: — H:Housing

3: — No. of Positions

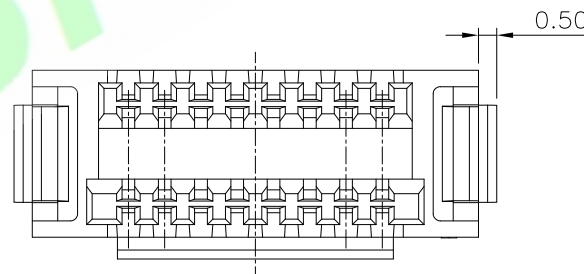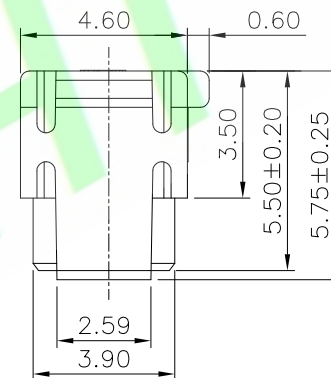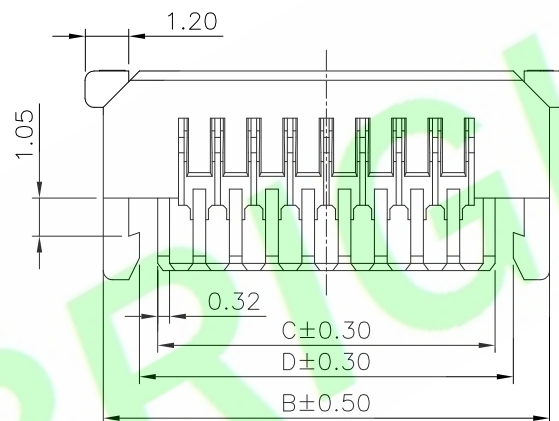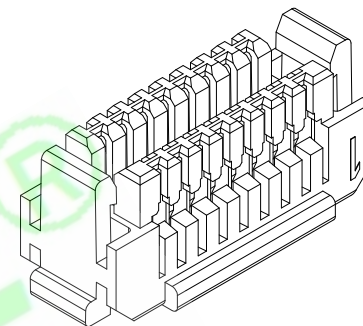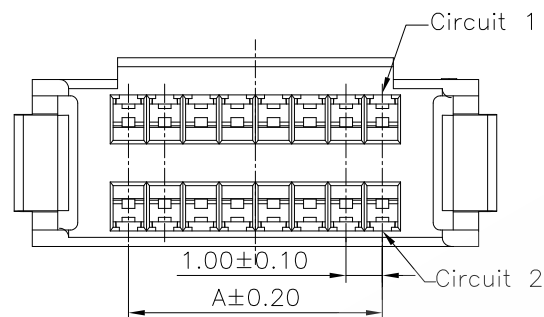

Circuits	Dimensions			
	A	B	C	D
10	4.00	9.30	6.30	7.30
16	7.00	12.30	9.30	10.30
20	9.00	14.30	11.30	12.30
30	14.00	19.30	16.30	17.30
40	19.00	24.30	21.30	22.30
50	24.00	29.30	26.30	27.30
60	29.00	34.30	31.30	32.30

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A1026H-XXP	
4X				Samson	LINEAR	ANGLES	BURY P/N:	
3X				CHKD.:	X.:	X': ±5.0°	TITLE :	
2X				Tony	X.X: ±0.30	X.X': ±3.0°	1.0mm Pitch Housing	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.20	X.XX': ±2.0°	DATE: 05-Oct-2017	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4