RoHS Compliant

Specifications:
Material And Finish:
Insulator:Nylon 66 UL94V-2 Color:Black
Contact:Brass
Plated:See Ordering Information

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-25°~+85°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

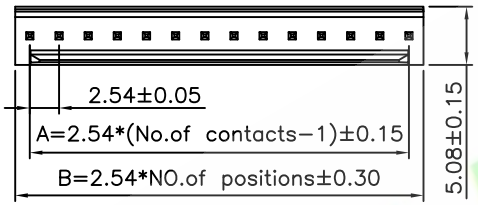



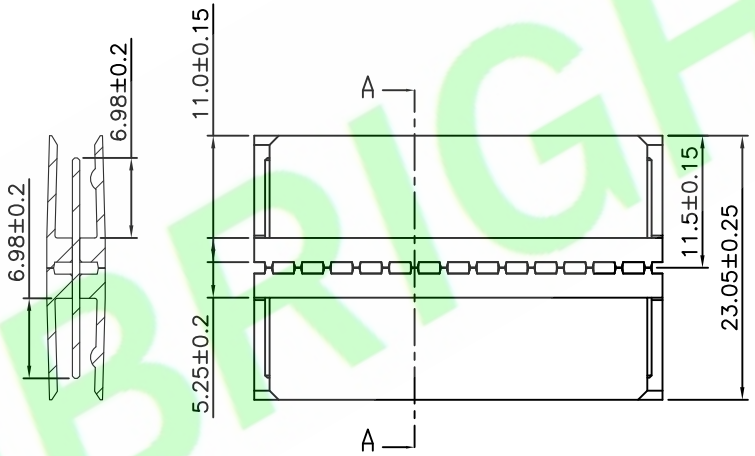



Ordering Information
A2549S-XXX-01-X
1 2 3 4 5

1: —— Series No.
2: —— S:Straight Type
3: —— No. of Positions
4: —— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: —— A:In Bag
B:In Tube
C:In Tray

Circuits	Dimension mm	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

REV.	DESCRIPTION	DR.BY	ECN. NO.
5X			
4X			
3X			
2X			
1X	ORIGINAL	Samson	

DR.BY.: Samson
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:

LINEAR		ANGLES	
X.:	±0.30	X°:	±5.0°
X.X:	±0.20	X.X°:	±3.0°
X.XX:	±0.15	X.XX°:	±2.0°
X.XXX:	±0.10	X.XXX°:	±1.0°

PART NO : A2549S-XXX-01-X
DWG. NO.: RD0806-062
TITLE : 2.54mm Pitch Wafer Straight Type
DATE: 21-Jun-2008

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

HJBRIGHT®