
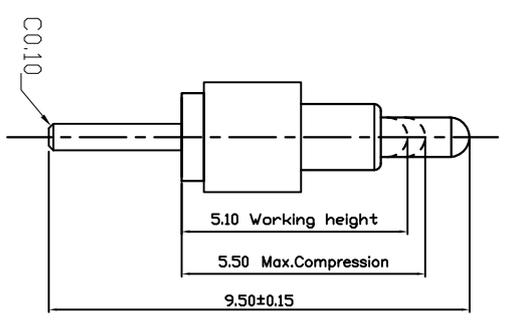
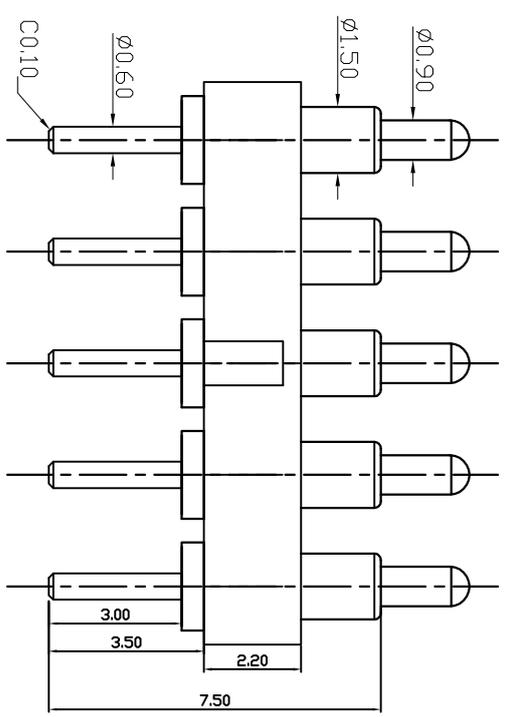


NOTE

1. Material
 Plunger: Brass 3604
 Barrel: Brass 3604
 Spring: SUS304
2. Plating
 Plunger: 3 micro-inch minimum Au
 over 50~100 micro-inch nickel
 Barrel: 3 micro-inch minimum Au
 over 50~100 micro-inch nickel
3. Electrical
 Rated current & voltage: DC 12V; 1A .
 Contact resistance: 50 mohm maximum
 at working height
4. Mechanical
 Spring force: 50g±20% at working height
 Durability: 30,000 cycles(minimum)
5. RoHS compliant product.

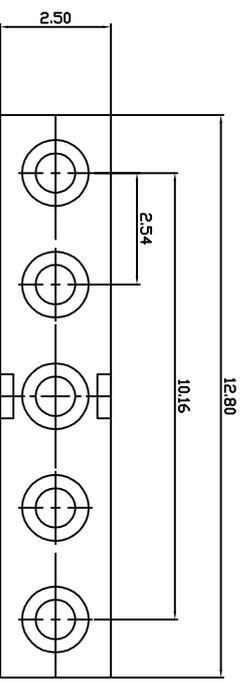

5X			DR.BY: Bruce	GENERAL TOLERANCE(SO2768-mm)	PART NO: P1843-0105	HIBRIGHT® BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED 東莞市華晶電子有限公司	SHEET: 1/1 SCALE: 1:1 UNIT: mm	THIRD ANGLE PROJECTION	A4
4X				LINEAR	DWG. NO.: P030 5PIN				
3X			CHKD: Tony	(0.5~3)±0.1	DATE: 12-Jun-2018				
2X			APPD: Billy	(3~6)±0.1					
1X	ORIGINAL	Bruce		(6~30)±0.2					
REV.	DESCRIPTION	DR.BY	ECN. NO.	(30~120)±0.3					