


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute


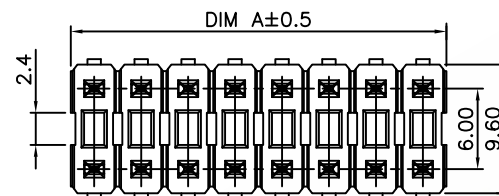



CKT SIZE	DIM A	DIM B
2X2	7.00	3.50
2X3	10.5	7.00
2X4	14.00	10.50
2X5	17.50	14.00
2X6	21.00	17.50
2X7	24.50	21.00
2X8	28.00	24.50
2X9	31.50	28.00
2X10	35.00	31.50

35012M-XXS228-NX

$$\begin{array}{ccccccc} & \overline{\quad} & \overline{\quad} & & & & \\ & 1 & 2 & 3 & 4 & & 5 \\ & & & & & & \end{array}$$

- 1:—Series No.
2:—M:SMT Type
3:—No. of Positions
4:—S:2.5um Min matte tin over 1.25um nickel
5:—A:In bag
B:In Tube
C:In Tray
G:Tape&Reel

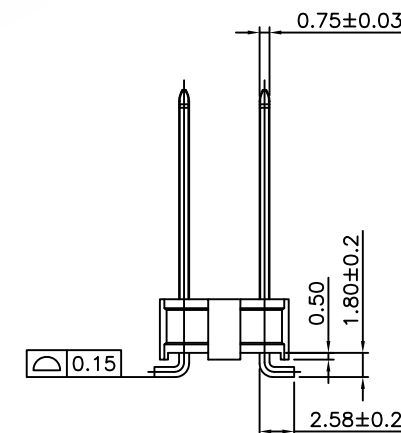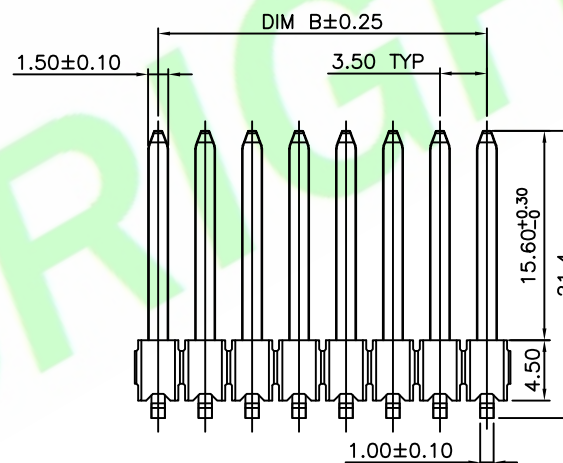

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 35012M-XXS228-NX	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±	x': ±5.0"	TITLE : 3.5X6.0mm Pitch Pin Header SMT type					
2X					x.x: ±0.50	x.x': ±3.0"						
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.25	x.xx': ±2.0"	DATE: 24-Jul-2019	SHEET: 1/1	SCALE: 1:1	UNIT: mm		
REV	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0"						