





Insulator: **LCP** UL94V-0 Color: **Black**
Contact: **Brass**

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{ C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:—Series No.
2:—R:R/A Type
3:—No. of Positions
4:—A:Gold Flash
H:Gold Flash on contact;Matte Tin on tail
Q:Tin Plated
T:10u” Gold on contact;Matte Tin on tail
5:—A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

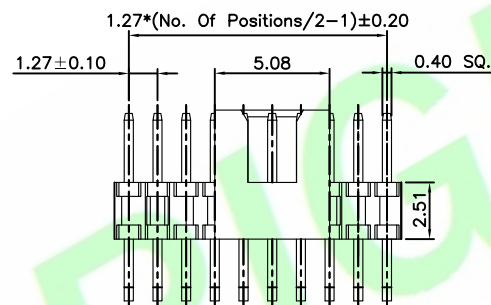

Recommended PCB Layout
(Tolerance:0.05mm)

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 12762R-XXX108-X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE :		SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X					x.x: ±0.20	x.x': ±3.0"	1.27mm Pitch Pin Header R/A Type		SCALE: 1:1			
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"	DATE: 24-Jul-2019		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"						