

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC

Ordering Information**B2548R-XXX-XX-NX**

1 2 3 4 5 6

- 1: — Series No.
2: — R/R/A Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Flash
Y:30u" Gold on contact;Matte Tin on tail
5: — Eject Type:
01:Long Eject(DIM D=14.55)
02:Short Eject(DIM D=10.65)
6: — B:In Tube
C:In Tray

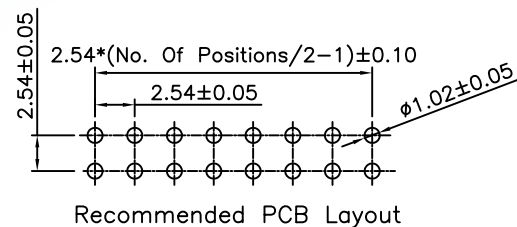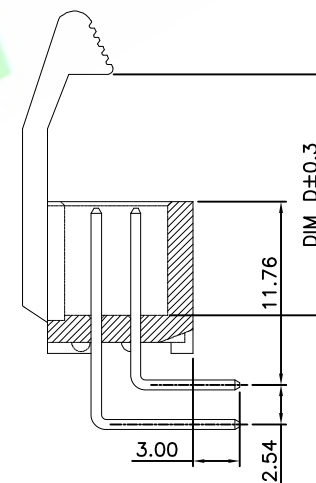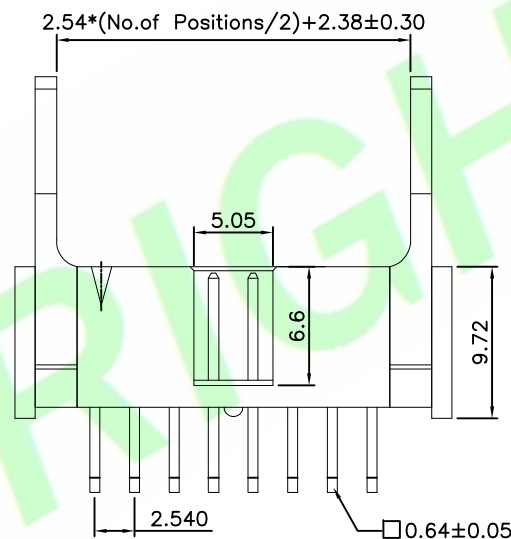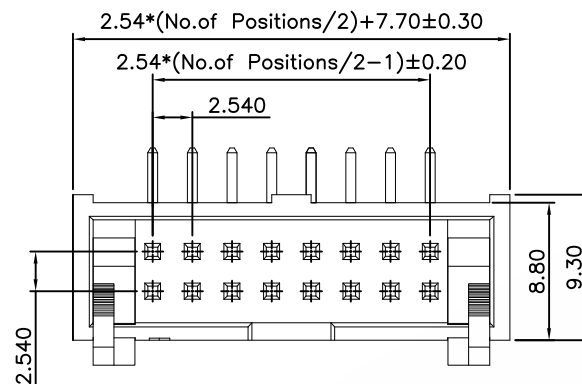

5X				DR.BY.: Apra Yang	GENERAL TOLERANCE:		PART NO : B2548R-XXX-XX-NX
4X					LINEAR	ANGLES	
3X				CHKD.: Aaron	x.: x': ±5.0°	DWG. NO.: TITLE : 2.54mm Pitch Box Header R/A Type With Metal Eject Latch	
2X					x.x: ±0.40 x.x': ±3.0°		
1X				APPD.: x.xx: ±0.25 x.xx': ±2.0°			
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.15 x.xxx': ±1.0°		DATE: 25-Sep-2017