

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:White

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25° C~+85° C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:1000V AC/Minute

Ordering Information

A2002R-XXX-01-X

1 2 3 4 5

- 1: — Series No.
2: — R:R/A Type
3: — No. of Positions
4: — A:Gold Flash
Q:Tin Plated
S:Matte Tin plated
5: — A:In bag
B:In Tube
C:In Tray

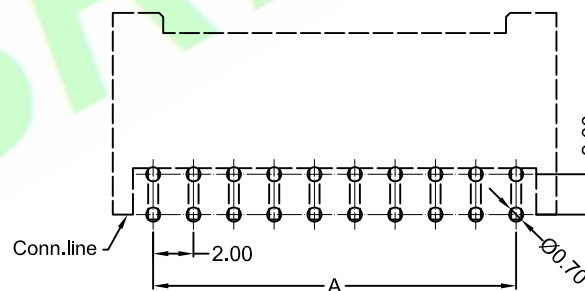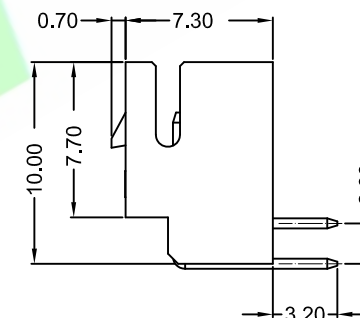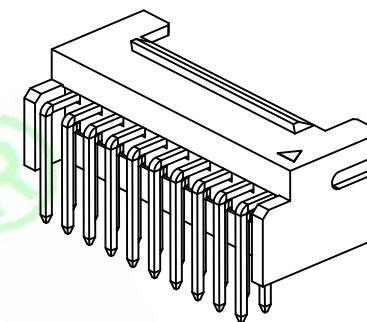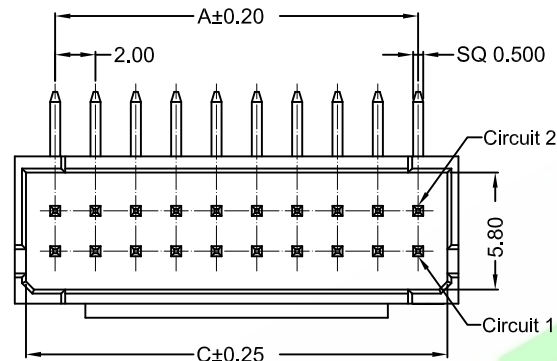

Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions (mm)		
	A	B	C
04	2.00	6.00	4.90
06	4.00	8.00	6.90
08	6.00	10.00	8.90
10	8.00	12.00	10.90
12	10.00	14.00	12.90
14	12.00	16.00	14.90
16	14.00	18.00	16.90
18	16.00	20.00	18.90
20	18.00	22.00	20.90

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A2002R-XXX-01-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Samson	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	x.:	x': ±5.0°	TITLE : Pitch 2.00mm Wafer Connectors		SHEET: 1/1		A4	
2X				Tony	x.x: ±0.30	x.x': ±3.0°			SCALE: 1:1			
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.20	x.xx': ±2.0°	DATE: 12-Jan-2015		UNIT: mm			THIRD ANGLE PROJECTION
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°						