

Specifications:**Material And Finish:**

Insulator:PBT+30%GF UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:15m Ohm Max



Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC





Ordering Information**B25413S-XXX-01-X**

1 2 3 4 5





- 1: — Series No.
 2: — S: Straight Type
 3: — No. of Positions
 4: — A: Gold Flash
 Q: Tin Plated
 6: — A: In Bag
 B: In Tube
 C: In Tray

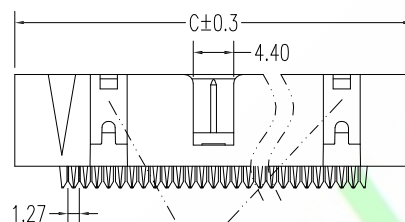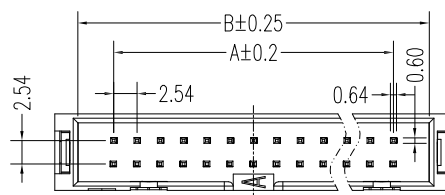

20P~64P有槽

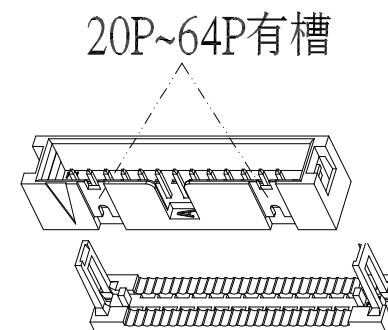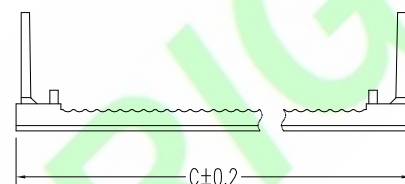

10P/14P/16P无槽



10P有开反扣模具

Circuit	Dim. A	Dim. B	Dim. C
10	10.16	18.24	22.95
14	15.24	23.32	28.03
16	17.78	25.86	30.57
20	22.86	30.94	35.65
24	27.94	36.02	40.73
26	30.48	38.56	43.27
30	35.56	43.64	48.35
34	40.64	48.72	53.43
40	48.26	56.34	61.05
50	60.96	69.04	73.75
60	73.66	81.74	86.45
64	78.74	86.82	91.53

5X				DR.BY.: Sophia	GENERAL TOLERANCE:		PART NO : B25413S-XXX-XX-X	HJBRIGHT ® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Aaron	X.:	X': ±5.0°	TITLE : 2.54mm Pitch Box Header Straight Type Without Eject Latch		SHEET: 1/1
2X				APPD.: Billy	X.X: ±0.40	X.X': ±3.0°			SCALE: 1:1
1X	ORIGINAL	Sophia			X.XX: ±0.25	X.XX': ±2.0°	DATE: 18-Apr-2020		UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°			THIRD ANGLE PROJECTION

A4