

Specifications:

Material And Finish:


Insulator: PBT+30% UL94V-0
 Contact: Brass
 Shell: Steel With Nickel Plated.
 Plated: See Ordering Information

Rating:

Current Rating: 5.0 Amp
 Operating Temperature Range: -55~+105°C

Electrical:

Contact resistance: 30m Ohm Max
 Insulator resistance: 5000M ohm min.
 Withstanding Voltage: 1000V AC/Minute

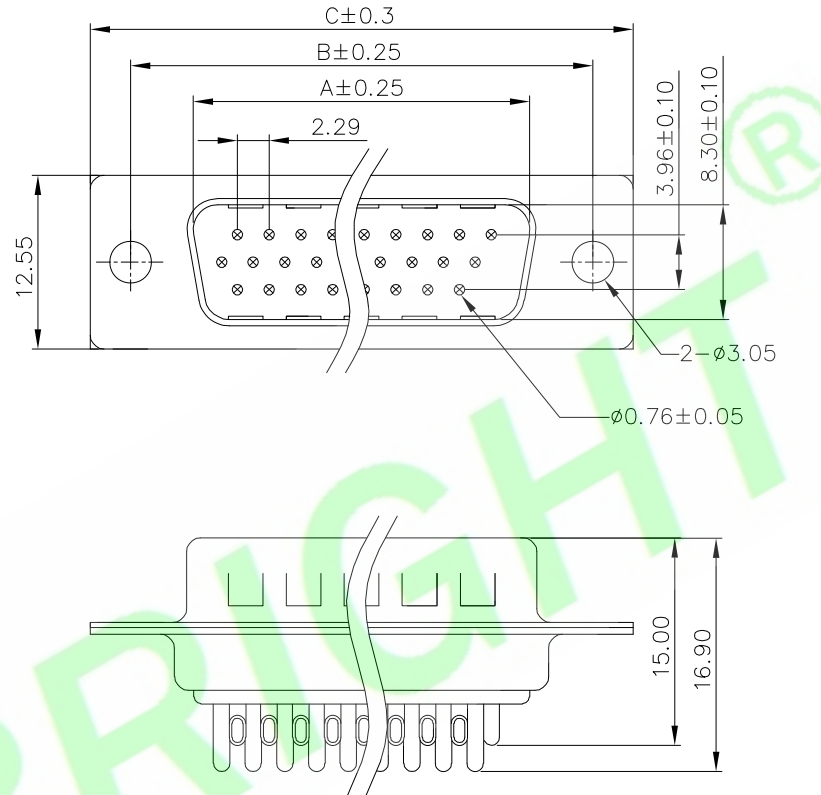

Ordering Information
DSH01S-XXM5-02-CH

1 2 3 4 5 6 7

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — M: Male
- 5: — 5: Selective Gold Plated
- 6: — C: In Tray
- 7: — H: 48 hours Salt Spray

PIN	A	B	C
15	16.90	24.99	30.80
26	25.25	33.30	39.20
44	38.96	47.04	53.10
62	55.42	63.50	69.34

5X				DR.BY.: Jack	GENERAL TOLERANCE:		PART NO : DSH01S-XXM5-02-CH		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				CHKD.: Kenry	LINEAR	ANGLES	DWG. NO.: DSH01-XXM-BK-48H		
3X				APPD.: Billy	X.: ±0.38	X': ±5.0°	TITLE : D-SUB 高密度 15P公头 传统焊线式		SHEET: 1/1
2X					X.X: ±0.35	X.X': ±3.0°	DATE: 27-Oct-2017		SCALE: 1:1
1X	ORIGINAL	Jack			X.XX: ±0.25	X.XX': ±2.0°			UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.15	X.XXX': ±1.0°			THIRD ANGLE PROJECTION

A4