




Specifications:
Material And Finish:
 Insulator: Nylon 6T UL94V-0 Color: Black
 Contact: Brass
 Plated: See Ordering Information

Rating:
 Current Rating: 1.0 Amp
 Voltage Rating: 100V AC/DC
 Operating Temperature Range: -40°~+105°C


Electrical:
 Contact resistance: 40m Ohm Max
 Insulator resistance: 500M ohm min.
 Withstanding Voltage: 500V AC/Minute

Ordering Information
B1271M-XXX-02-1X
 1 2 3 4 5

- 1: Series No.
- 2: M:SMT Type
- 3: No. of Positions
- 4: A: Gold Flash
H: 15u" Gold on contact; Matte Tin on tail
- 5: A: In bag
B: In Tube
F: W/Cap In Tape & Reel

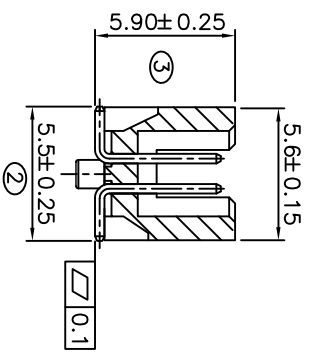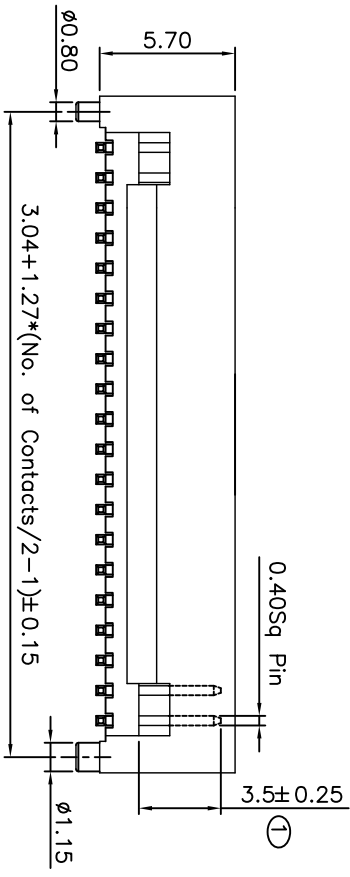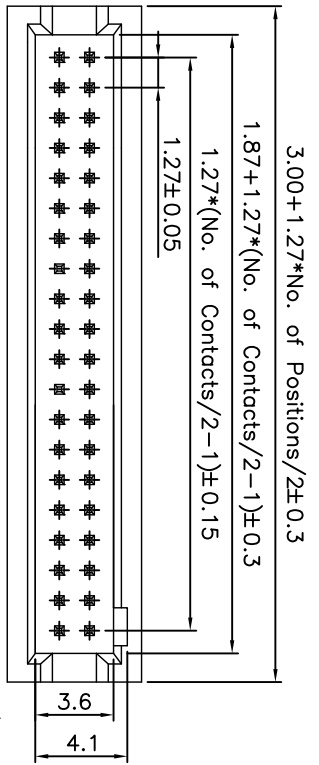

Recommended PCB Layout

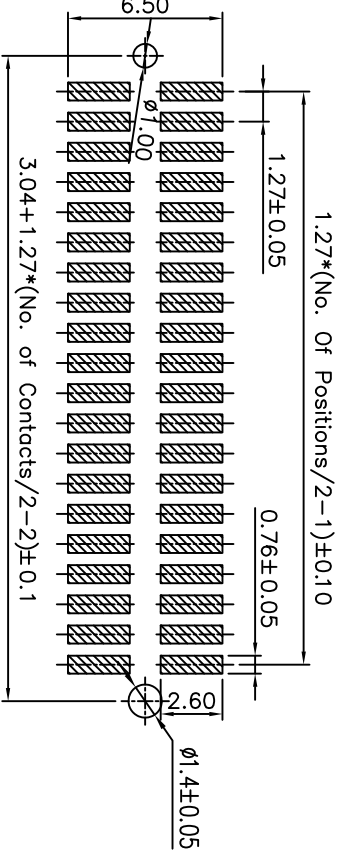

5X		DR.BY: Joy chen	GENERAL TOLERANCE:	PART NO : B1271M-XXX-02-1X	HIBRIGHT 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED	
4X			LINEAR	DWG. NO.:	SHEET: 1/1	
3X			ANGLES		SCALE: 1:1	
2X			X: ±0.30 X: ±5.0°	TITLE :	THIRD ANGLE PROJECTION	
1X	ORIGINAL	Joy chen	XX: ±0.20 XX: ±3.0°	Box Header SMT Type	A4	
REV.	DESCRIPTION	DR.BY	XXX: ±0.15 XXX: ±2.0°	DATE: 12-May-2013		
			XXX: ±0.10 XXX: ±1.0°			