


Specifications:
Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:
 Current Rating:1.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40°~+105°C

Electrical:
 Contact resistance:40m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 B1271R-XXX-02-X

- 1: Series No.
- 2: R:R/A Type
- 3: No. of Positions
- 4: A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 5: A:In bag
B:In Tube

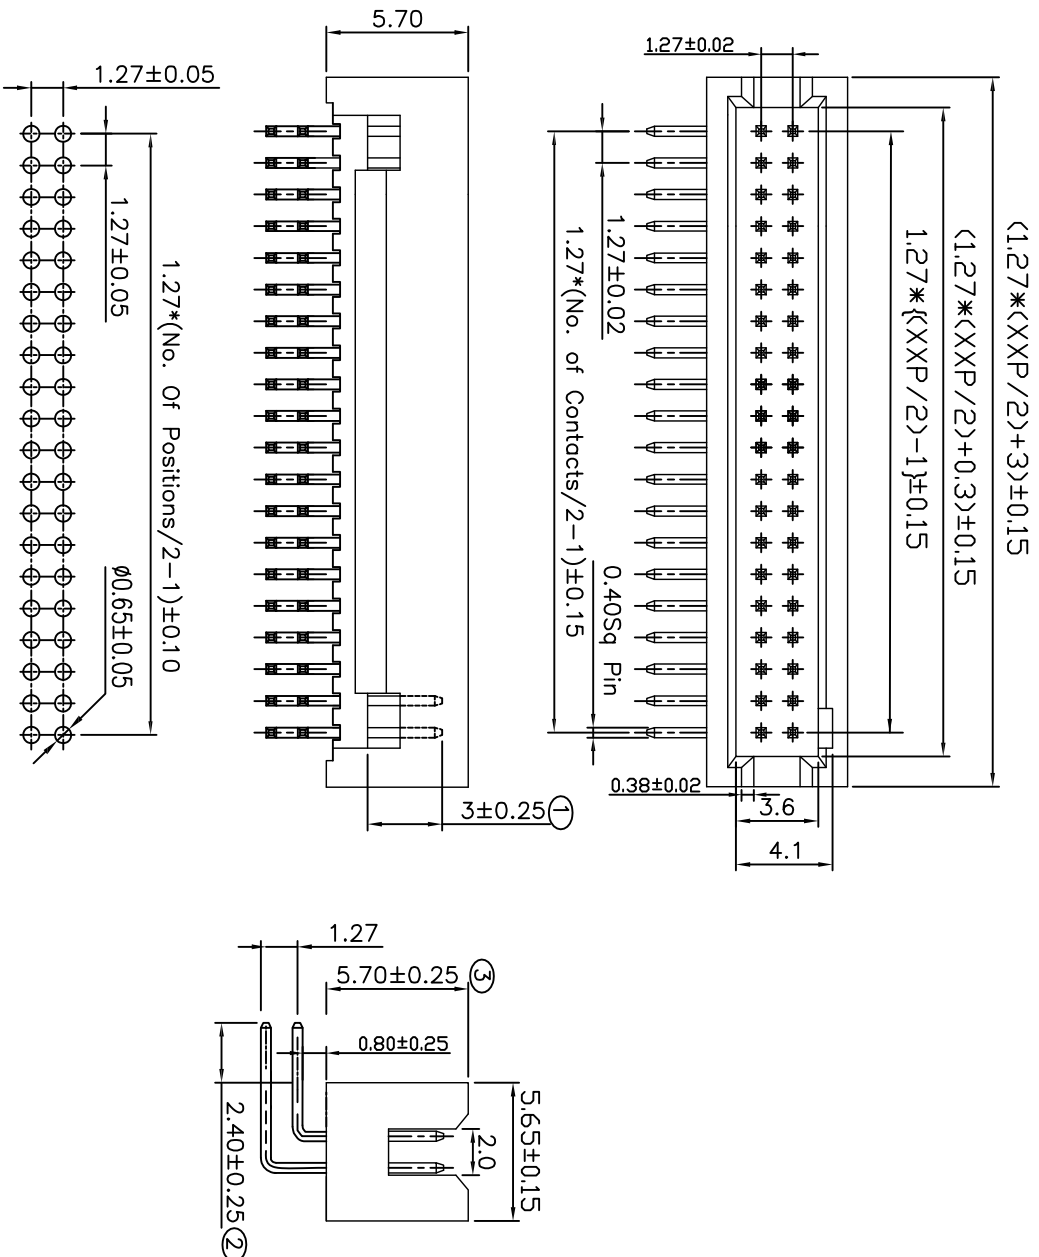

Recommended PCB Layout

5X		DR.BY:		GENERAL TOLERANCE:	PART NO : B1271R-XXX-02-X	HIBRIGHT BRIGHTE ELECTRONIC TECHNOLOGY LIMITED 东莞市華晶電子有限公司	 THIRD ANGLE PROJECTION	A4
4X			LINEAR ANGLES	DWG. NO: RDD0805-042				
3X		CHKD: 朱波		X: ±0.30 X: ±5.0°	TITLE : 1.27mm Pitch	SHEET: 1/1		
2X				XX: ±0.20 XX: ±3.0°	Box Header R/A Type	SCALE: 1:1		
1X	ORIGINAL	joy chen	APPD:	XXX: ±0.15 XXX: ±2.0°	DATE: 12-May-2008	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO	X,XXX: ±0.10 X,XXX: ±1.0°				