

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp
 Voltage Rating:100V AC/DC
 Operating Temperature Range:-40°~+105°C

Electrical:





Contact resistance:40m Ohm Max
 Insulator resistance:500M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

B1272R-XXX-02-X

1 2 3 4 5

- 1: — Series No.
- 2: — R/R/A Type
- 3: — No. of Positions
- 4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
- 6: — A:In bag
B:In Tube

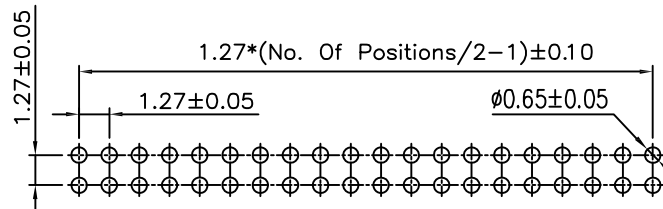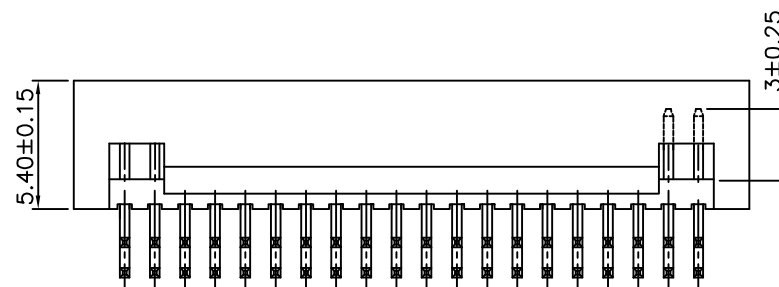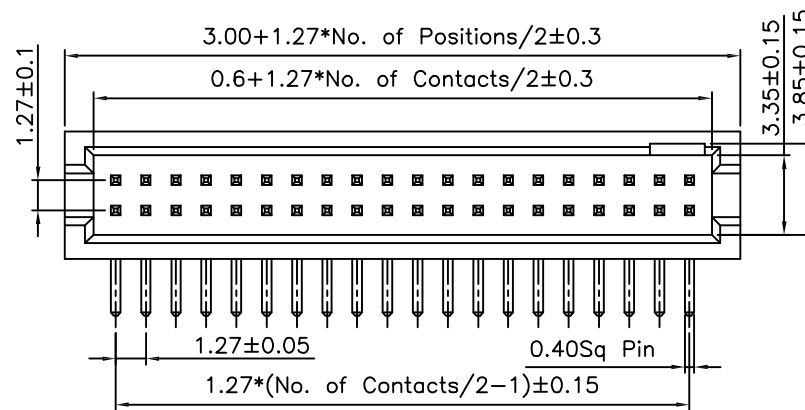


Recommended PCB Layout

5X				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : B1272R-XXX-02-X
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	x.: ± 0.30	x': $\pm 5.0^\circ$	TITLE : 1.27mm Pitch Box Header R/A Type
2X					x.x: ± 0.20	x.x': $\pm 3.0^\circ$	DATE: 12-May-2008
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ± 0.15	x.xx': $\pm 2.0^\circ$	
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ± 0.10	x.xxx': $\pm 1.0^\circ$	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



THIRD ANGLE PROJECTION

A4