

Specifications:**Material And Finish:**

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**B12722M-XXX-01-CX**

1 2 3 4 5

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated



Q:Tin Plated

5:— A:In bag



B:In Tube

D:Tape&Reel

F:W/Cap In Tape&Reel

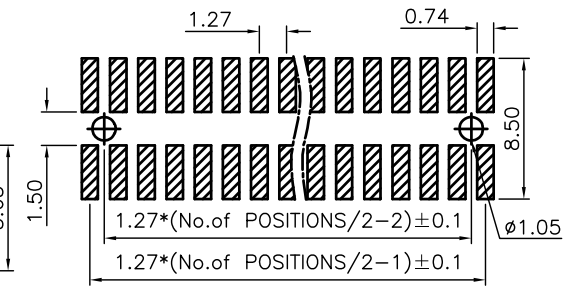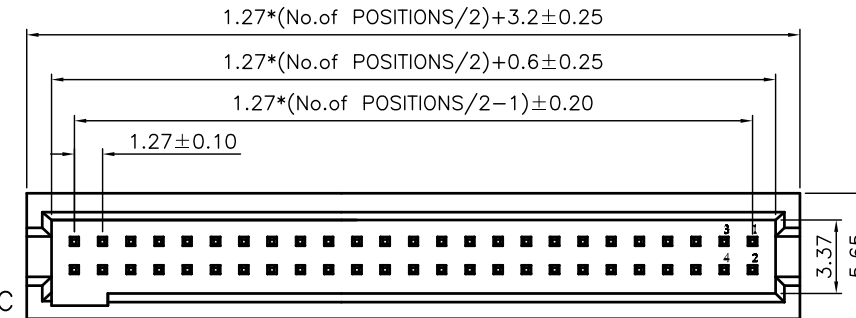

Recommended PCB Layout

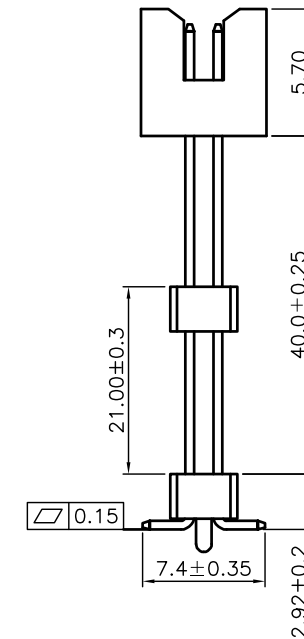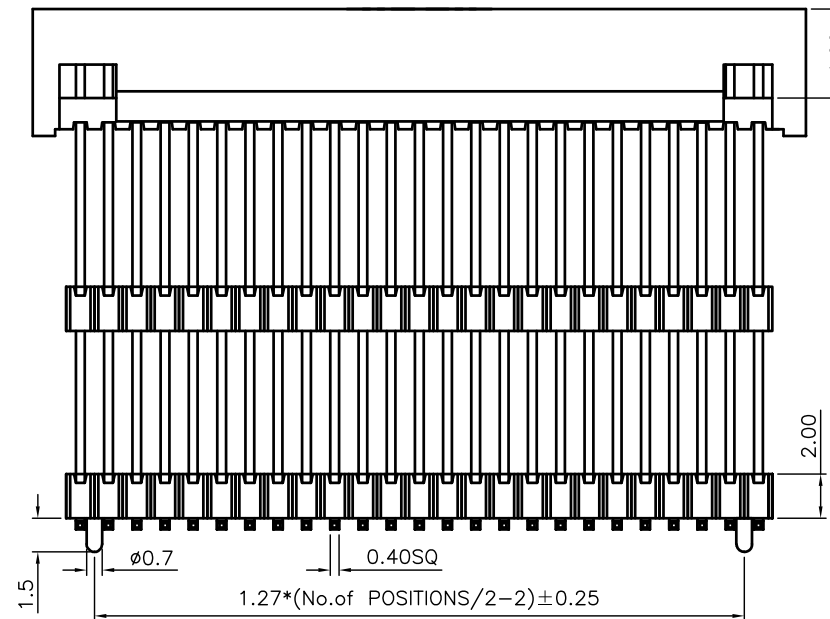

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B12722M-XXX-01-CX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED			
4X						LINEAR	ANGLES				
3X				CHKD.: Tony	X.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type	SHEET: 1/1		A4	
2X					X.X: ±0.25	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.:	X.XX: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	X.XXX: ±0.10	x.xxx': ±1.0°	DATE: 27-Aug-2015	THIRD ANGLE PROJECTION			