

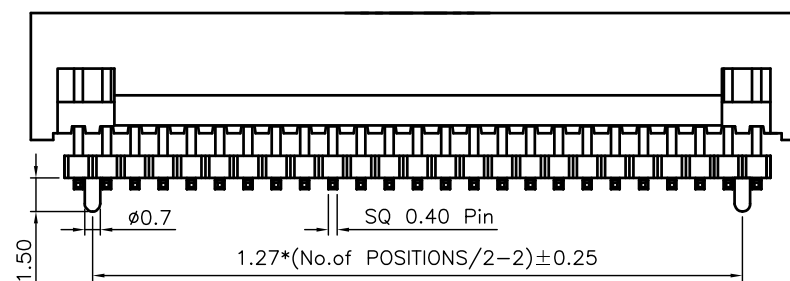


Plated: See Ordering Information


Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

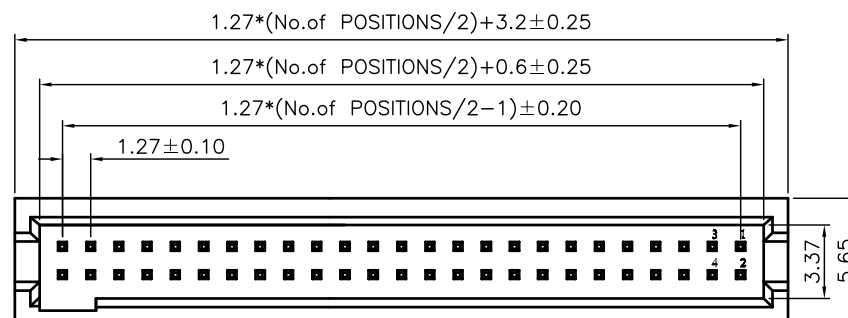

1	2	3	4	5
---	---	---	---	---

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
D:Tape&Reel

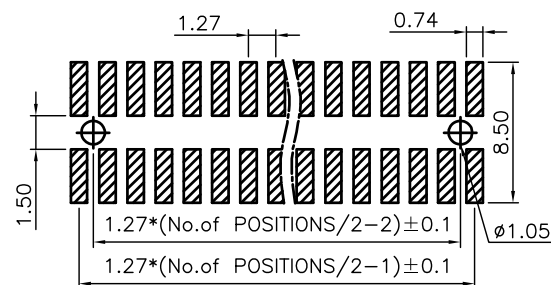

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : B12722M-XXX-02-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED			
4X				Kenry	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type	SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X				Tony	x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	Kenry		APPD.:	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 27-Aug-2015				