

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max





Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**B12722M-XXX-03-NX**

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
C:In Tray
D:Tape&Reel

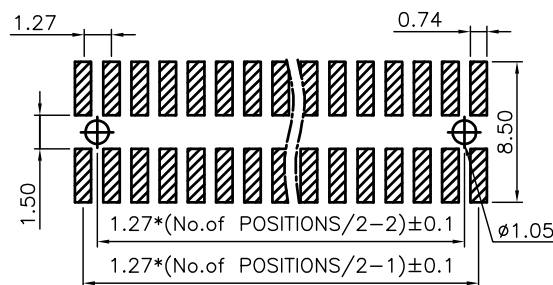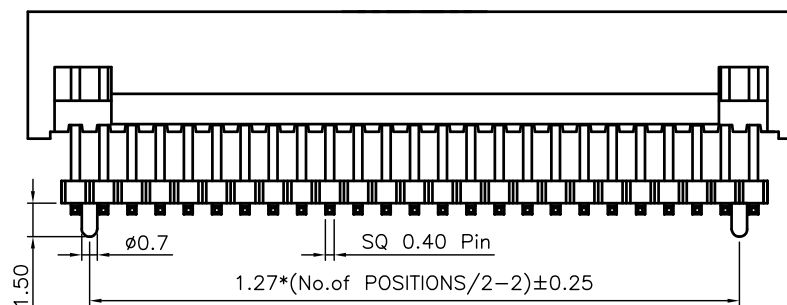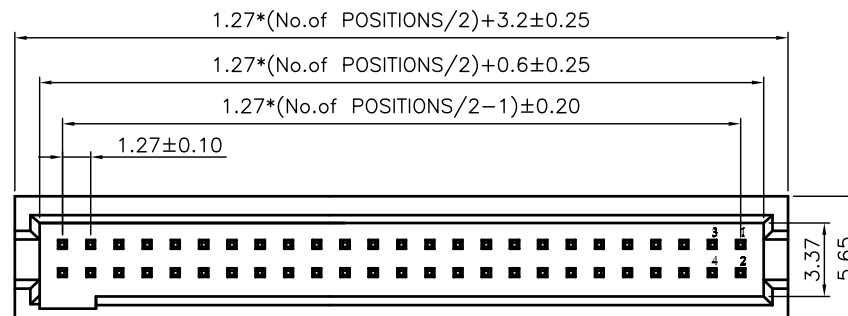

Recommended PCB Layout

5X				DR.BY.: Kenry	GENERAL TOLERANCE:		PART NO : B12722M-XXX-03-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
4X					CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:			
3X				APPD.: Billy		x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Box Header SMT Type		SHEET: 1/1	
2X					x.x: ±0.25	x.x': ±3.0°	SCALE: 1:1				
1X	ORIGINAL	Kenry		x.xx: ±0.15	x.xx': ±2.0°	DATE: 27-Aug-2015		UNIT: mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°					