

Specifications:**Material And Finish:**

Insulator:PA6T UL94V-0 Color:Black
& PBT UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B2541R-XXX-XX-XX-X

12 3 4 5 6 7 8

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash

C:Gold 5u"

D:Gold 10u"

H:Selective Gold Plated

S:Contact plated Gold flash;Solder tail: Tin Plated

Q: Tin Plated

5:— A:01=3.2mm 03=3.1mm 04=3.4mm

6:— N:PA6T UL94V-0

Blank:PBT UL94V-0





7:— A:In bag

B:In Tube

C:In Tray

8:— GR:color Gray

NF:南方专用

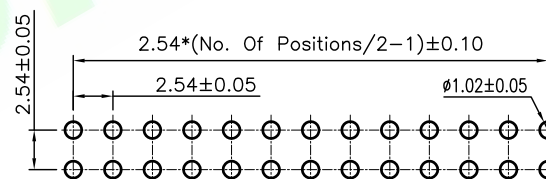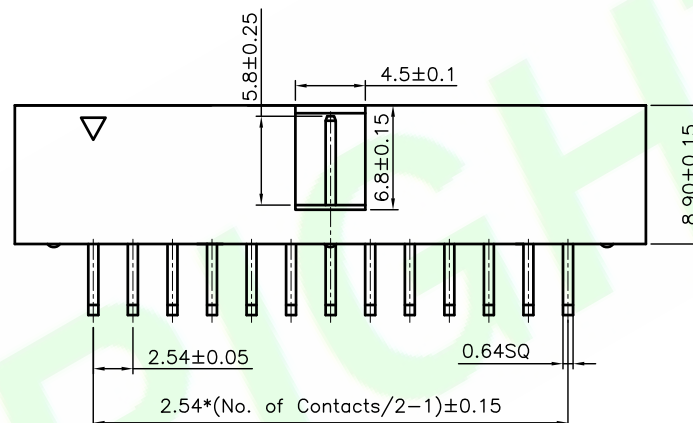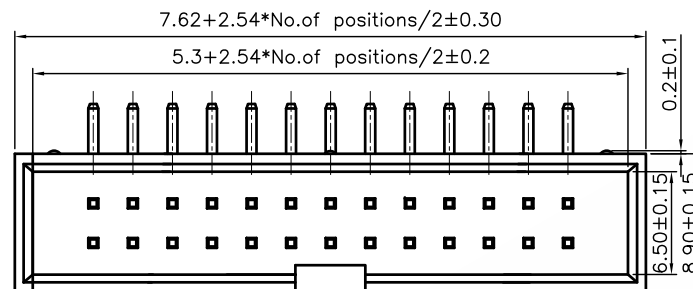

Recommended PCB Layout

5X				DR.BY.: Tsw	GENERAL TOLERANCE:		PART NO : B2541R-XXX-XX-XX-X	HJBRIGHT ® 东莞市华晶电子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Ren	X.: ±0.30	X': ±5.0°	TITLE : 2.54mm Pitch	SHEET: 1/1	 THIRD ANGLE PROJECTION	A4
2X					X.X: ±0.20	X.X': ±3.0°	Box Header R/A Type	SCALE: 1:1		
1X	ORIGINAL	Tsw		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 10-Aug-2020	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°				