

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

B25411M-XXX-01-0X

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
6: — A:In bag
B:In Tube
C:In Tray
F:W/Cap In Tape&Reel

RoHS Compliant


5X			
4X			
3X			
2X			
1X	ORIGINAL	joy chen	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: joy chen	GENERAL TOLERANCE:	
CHKD.: jerry Liu	LINEAR	ANGLES
APPD.: <i>Peter Li</i>	X.: ±0.30	X': ±5.0°
	X.X: ±0.20	X.X': ±3.0°
	X.XX: ±0.15	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : B25411M-XXX-01-0X
DWG. NO.: RD0805-102
TITLE : 2.54mm Pitch Box Header SMT Type
DATE: 17-May-2008






HJBRIGHT 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

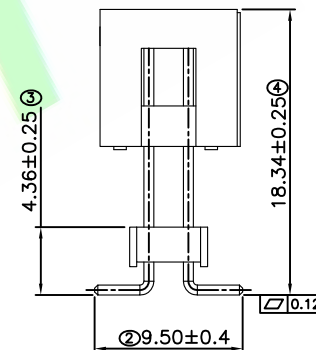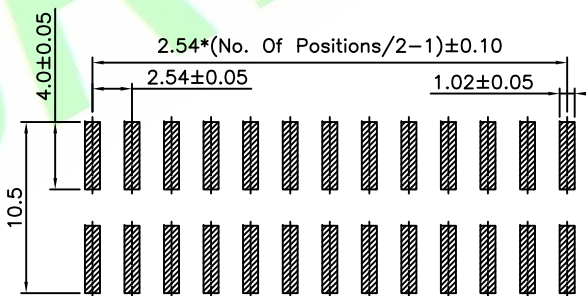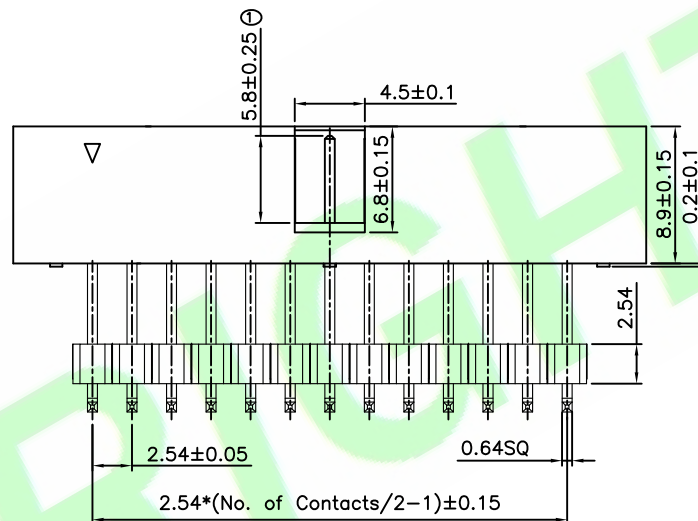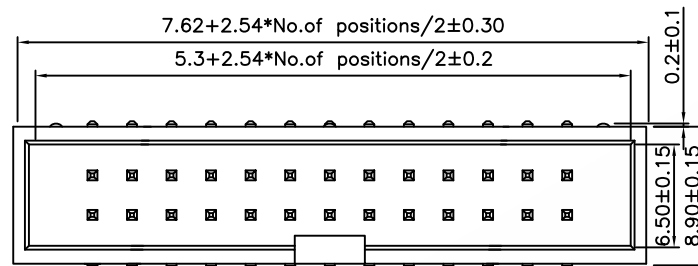

Recommended PCB Layout