

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S12722M-28A43D-1E**

1 2 3 4 5 6

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
5:— 1:With Peg
6:— E:W/Cap In Tape&Reel

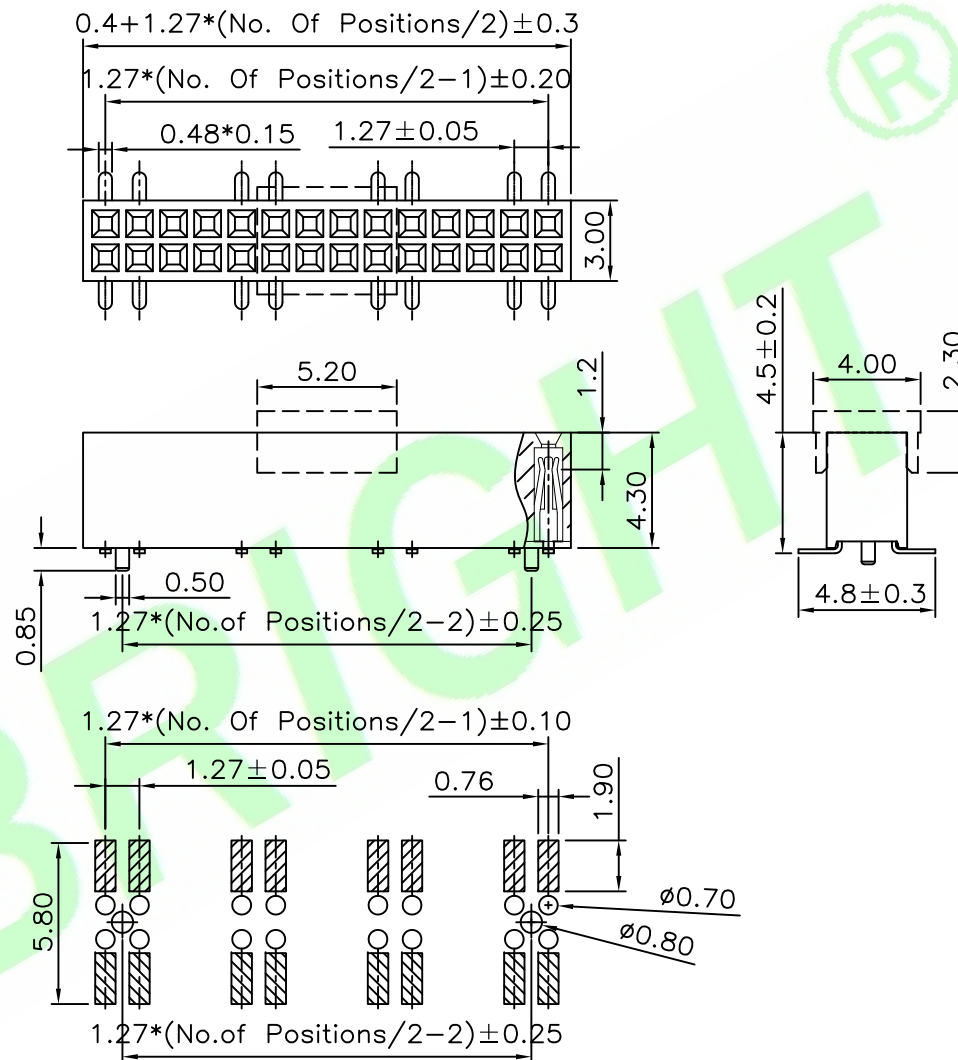

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S12722M-28A43D-1E		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type		SHEET: 1/1		A4
2X				Tony	x.x: ±0.20	x.x': ±3.0°			SCALE:1:1		
1X	ORIGINAL	Samson		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT:mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 12-Dec-2013				