

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information**S12722M-XXX43-01-0X**

1 2 3 4 5

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

D:10u"Gold on Contact;Gold Flash on tail

F:20u"Gold on Contact;Gold Flash on tail

H:Gold Flash on Contact;Matte Tin on tail

T:10u"Gold on Contact;Matte Tin on tail

Y:30u"Gold on Contact;Matte Tin on tail.


S:Matte Tin Plated.

5:— B:In Tube

C:In Tray

E:W/Cap In Tube

F:W/Cap In Tape&Reel

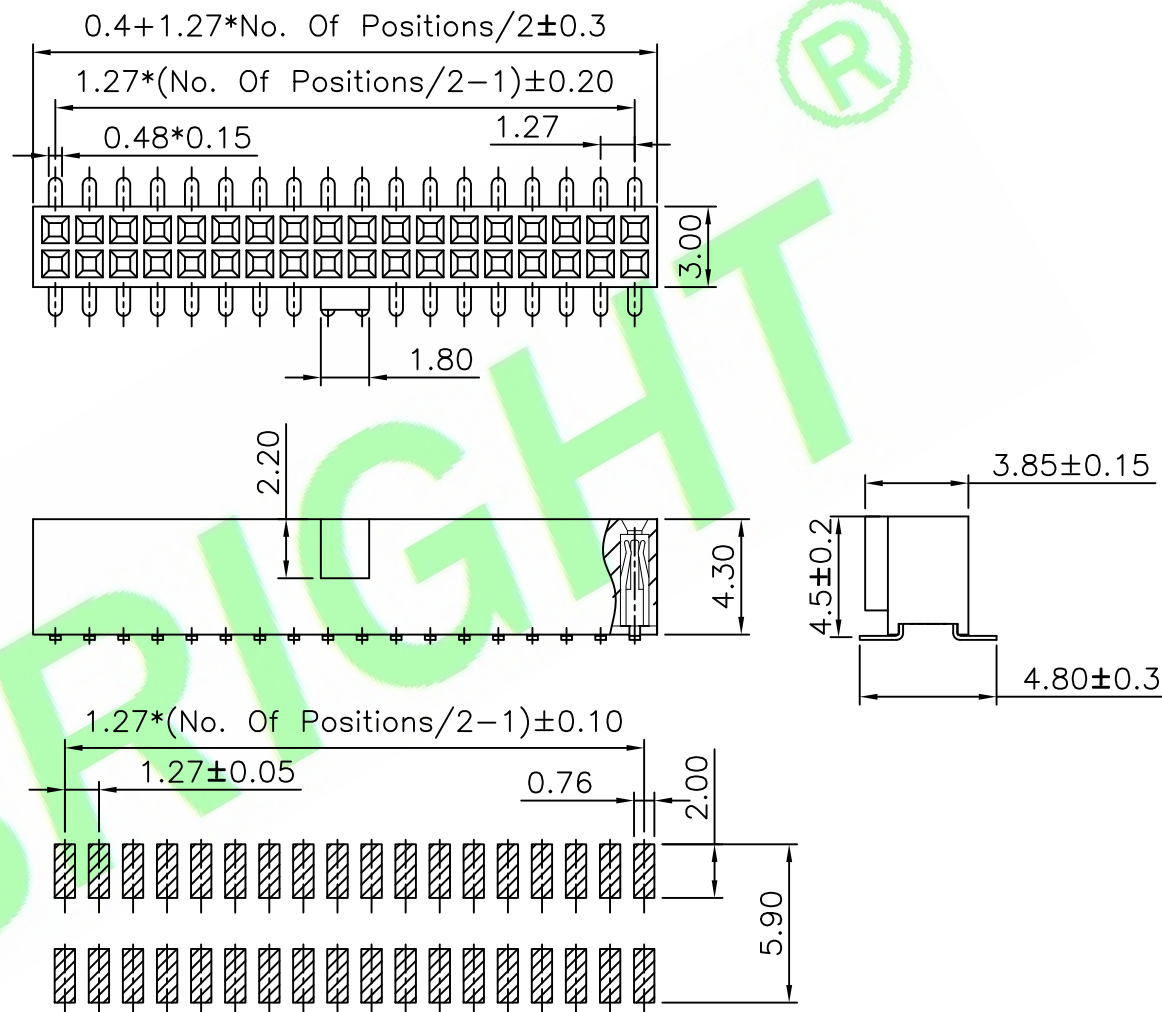

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S12722M-XXX43-01-0X		HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Bruce	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type				
2X				Tony	x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Bruce		APPD.:	x.xx: ±0.15	x.xx': ±2.0°	DATE: 28-Jun-2017		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
							UNIT: mm		THIRD ANGLE PROJECTION		